



130/105 LCC \$300

PATENT  
KAMMON 3.0-025

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of :  
SASAKI, et al.  
Serial No. 08/799,400  
Filed: February 12, 1997  
For: Closure For Cable Connection  
Group Art Unit: 3509  
Examiner: Not Assigned  
May 6, 1997

Assistant Commissioner for Patents  
Box Missing Parts  
Washington, D.C. 20231

SUBMISSION OF EXECUTED DECLARATION

Sir:

In response to the Notice to File Missing Parts dated April 29, 1997 (a copy of which is enclosed herewith), Applicant herewith encloses the original executed Declaration for the above-identified patent application which was filed on February 12, 1997. Also enclosed is a check in the amount of \$130.00 to cover the surcharge for filing a Declaration on a date later than the filing date of the application.

If the Examiner has any questions concerning this matter, he is requested to call applicant's attorney at (908) 654-5000.

If there are any additional fees, please charge them to our Deposit Account No. 12-1095.

Respectfully submitted,  
LERNER, DAVID, LITTENBERG,  
KRUMHOLZ & MENTLIK

ARNOLD H. KRUMHOLZ  
Reg. No. 25,428

600 South Avenue West  
Westfield, New Jersey 07090-1497  
(908) 654-5000

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as First Class mail in an envelope addressed to Assistant Commissioner for Patents, Washington, D.C. 20231 on May 6, 1997.

Arnold H. Krumholz  
Typed or Printed Name of Person Signing Certificate

08799400 021297

06/09/1997 LCHLNER 00000120 08799400 130.00 DP 01 FC:105

08/799400



02/12/97

77035 U.S. PTO

LAW OFFICES



LERNER, DAVID, LITTENBERG, KRUMHOLZ &amp; MENTLIK

600 SOUTH AVENUE WEST

WESTFIELD, NEW JERSEY 07090-1497

(908) 654-5000

FAX (908) 654-7866

PATENTS TRADEMARKS AND COPYRIGHTS

February 12, 1997

PETER J. BUTCH III  
 ROBERT B. COHEN  
 MICHAEL H. TESCHNER  
 JEFFREY S. DICKEY  
 GREGORY S. GEWIRTZ  
 JONATHAN A. DAVID  
 SHAWN P. FOLEY\*  
 ROBERT T. CANAVAN  
 JOHN P. MALDJIAN

OF COUNSEL  
 DANIEL H. BOBIS  
 W. DREW KASTNER

\*NORTH CAROLINA BAR ONLY

BOX PATENT APPLICATION  
 Assistant Commissioner For Patents  
 Washington, D.C. 20231

File No.: KAMMON 3.0-025  
 Inventor(s): SASAKI, et al  
 Title: CLOSURE FOR CABLE CONNECTION

Dear Sir:

Enclosed herewith please find the following documents in the above-identified application for Letters Patent of the United States:

1	Pages of Abstract	Unexecuted Declaration (executed Declaration to follow)
28	Pages of Specification	One (1) return-addressed postcard
30	Number of Claims	PLEASE PROVIDE FILING DATE AND SERIAL NUMBER
37	Sheets of Drawings <input checked="" type="checkbox"/> A4 <input type="checkbox"/> 11"	

Check No. 14671 in the amount of \$990.00 calculated as follows:

Basic Fee		\$ 770.00
Additional Fees:		
Total number of claims (including multiple dependent claims):	30	
Total number of claims in excess of 20: 10 x \$22		220.00
Number of independent claims:	1	
Number of independent claims minus 3:	x \$80	
Fee for multiple dependent claim(s) (\$260)		
<b>TOTAL FILING FEES</b>		<b>\$ 990.00</b>

CONVENTION DATE: for Appln. S.N. is claimed.  
 Priority Document: ☐ Enclosed ☐ Will follow

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, the Patent Office is authorized to charge any amount owing to our Deposit Account No. 12-1095.

Respectfully submitted,

LERNER, DAVID, LITTENBERG,  
 KRUMHOLZ & MENTLIK

ARNOLD H. KRUMHOLZ

Reg. No. 25428

LB (LBUNEX) 62710

EXPRESS MAIL LABEL NUMBER: EM060526496US

EM060526496US

37/ 990.70/A

77035 U.S. PTO



02/12/97

TITLE OF THE INVENTION  
CLOSURE FOR CABLE CONNECTION

67212 U.S. PTO

08/799400



02/12/97

BACKGROUND OF THE INVENTION

This invention relates to a closure for protection of a connection section or splicing section of a communication cable such as an optical fiber cable or the like, and more particularly to an improvement in a closure for cable connection for an optical fiber cable.

In general, a closure for cable connection includes end plates through which cables with a cable connection section being interposed therebetween are inserted and a cylindrical sleeve formed of two split parts so as to cover the cable connection section and constructed in a manner to be split in a longitudinal direction. The two parts for the sleeve arranged between the end plates are joined to each other through abutting portions thereof opposite to each other using any suitable fixing means such as a bolt, a band or the like, resulting in providing the sleeve for airtightly protecting the cable connection section.

The conventional sleeve thus constructed for protecting the cable connection section is required to exhibit rigidity sufficient to prevent deformation of the sleeve and properties sufficient to prevent intrusion of moisture thereinto. For this purpose, the sleeve is so constructed that components of the sleeve are intimately or tightly coupled to each other and coupling between the cable and the sleeve is likewise tightly carried out. Unfortunately, such construction of the conventional sleeve causes setting of the cable led out of the end plates and handling of the sleeve to be substantially troublesome. Also, the conventional sleeve has another disadvantage of requiring a cable storage provided with an airtight member in order to ensure sufficient fastening of the cable. However, this renders manufacturing of the sleeve troublesome and costly and deteriorates durability of the sleeve. Further, in order to ensure that the conventional sleeve exhibits satisfactory airtightness, force for fastening the end plates must be strictly controlled and assembling of the sleeve is rendered laborious and time-consuming.

In the conventional closure, a support wire or a cable,

such as an aerial wire, a trunk cable or the like is fixed in the closure by a cable clamp. The cable clamp is formed with cable guide recesses each of which permits a cable of a maximum diameter to be fitted therein. Accordingly, when a cable of a small diameter is fixed by such a cable clamp, it is necessary to interpose a spacer or bush of a predetermined size between the cable and the cable guide recess or to wind a required number of turns of a tape having a certain thickness around the cable.

Such adjustment of an outer diameter of the cable with respect to the cable guide recess has conventionally been carried out at site, and thus replacement of the spacer or rewinding of the tape is highly troublesome. In addition, it is necessary to keep a number of spacers or bushes which have cable inserting holes of different diameters in correspondence to cables of various outer diameters and to select among them.

#### SUMMARY OF THE INVENTION

The present invention has been made in view of the foregoing disadvantages of the prior art.

Accordingly, it is an object of the present invention to provide a closure for cable connection which is capable of preventing deformation of a storage for a cable connection section.

It is another object of the present invention to provide a closure for cable connection which is capable of facilitating introduction and setting of a cable with respect to the closure while enhancing both safety and airtightness of the closure.

It is a further object of the present invention to provide a closure for cable connection which is capable of readily and positively accomplishing fixing of a cable with respect to the closure.

It is still further object of the present invention to provide a closure for cable connection which is capable of substantially increasing workability in assembling of the closure.

It is still another object of the present invention to provide a closure for cable connection which is capable of reducing the number of components to be replaced during installation or maintenance.

It is yet another object of the present invention to provide a closure for cable connection which is capable of being

significantly simplified in construction and reduced in manufacturing cost.

In accordance with the present invention, a closure for cable connection is provided. The closure for cable connection generally includes a pair of sleeve members which are formed with a semicylindrical shape and joined to each other in a manner to be vertically separable from each other, resulting in providing a cylindrical sleeve for surrounding a cable connection section and have abutting joint surfaces formed on both sides thereof, through which the sleeve members are joined together; end plates arranged on opposite ends of the sleeve and each formed with at least one cable guide hole through which a cable connected to the cable connection section is inserted; and hinges and fasteners releasibly hooked between the sleeve members to integrally connect the sleeve members to each other through the abutting joint surfaces arranged opposite to each other. In the closure of the present invention thus generally constructed, the end plates are each formed with a slit in a manner to extend from the cable guide hole to a portion of the end plate in proximity to an outer periphery of the end plate so as to permit a wall of the end plate to open by cutting along the slit. The cable guide hole is provided thereon with a thin-wall cap capable of being removed by cutting and the slit is detachably fitted therein with a rigidity holding member. The closure also includes an adhesive tape-like gasket interposed between the outer periphery of the end plate and an inner surface of the sleeve so as to cover an outer end of the slit.

In the closure for cable connection according to the present invention thus constructed, a jacket is removed by a required length from a cable and an internal slot rod is cut off by a predetermined dimension from a position of the cable at which removal of the jacket was carried out, followed by adjusting of tension members in a predetermined dimension, resulting in preliminary arrangement for cable connection being completed. Then, the jacket at a predetermined position of the cable is subjected to polishing and cleaning in a circumferential direction thereof and the rigidity holding member is removed from the cable guide hole of each of the end plates and then the thin-

452120 00165280

wall cap is removed from the cable guide hole and the slit is opened. Then, the slit is expanded to guide the cable through the expanded slit to the cable guide hole, to thereby insert the cable through the cable guide hole. Subsequently, the slit is mounted therein with a seal member and then fitted therein with an opening prevention connection member, to thereby keep the slit closed, followed by adhesion of the adhesive tape-like gasket to the outer periphery of the end plate so as to cover an end portion of the slit positioned contiguous to the outer periphery while being conformed thereto. Thereafter, spacers having an inner diameter required for a cable clamp are fitted in the cable guide recess and curved holding member to fasten the jacket at the end of the cable to the cable clamp and fasten the tension members to a cable tension member clamp of a tension member clamp. Then, the upper sleeve member is pivotally moved about each of the hinges on one side of the lower sleeve member while being kept held on the lower sleeve member by means of the hinges, resulting in the upper sleeve member being placed on the lower sleeve member while forcing the end plates against the lower sleeve member. Thereafter, the fasteners are fastened in order from a central portion of the sleeve members, to thereby provide the closure.

The closure thus assembled permits mounting of a cable seal member and that of the end plates to be strengthened while stabilizing a posture of the closure and airtightness of the closure to be highly increased, so that charging of gas into the cable connection closure through a valve ensures that it satisfactorily exhibits its inherent function.

Also, release of the fasteners permits the upper sleeve member to be readily pivotally moved about the hinges, resulting in the sleeve being open, so that a cable connection operation in the closure may be facilitated.

#### BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and many of the attendant advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings in which like reference numerals

designate like or corresponding parts throughout; wherein:

Fig. 1 is a partially exploded cut-away perspective view showing an embodiment of a closure for cable connection according to the present invention;

Fig. 2 is an exploded front elevation view showing a sleeve which may be incorporated in the closure of Fig. 1;

Fig. 3 is a partially cut-away side elevation view showing the closure of Fig. 1 which is kept assembled;

Fig. 4 is a fragmentary plan view showing a lower sleeve member of a sleeve which may be incorporated in the closure of Fig. 1;

Fig. 5A is an enlarged cross-sectional view taken along line 5A-5A of Fig. 4;

Fig. 5B is an enlarged cross-sectional view taken along line 5B-5B of Fig. 4;

Fig. 6A is a fragmentary front elevation view showing a gasket section which may be constructed in a closure for cable connection according to the present invention;

Fig. 6B is a side elevation view in section taken along line 6B-6B of Fig. 6A;

Fig. 7 is an enlarged front elevation view showing an end plate which may be incorporated in a closure for cable connection according to the present invention;

Fig. 8 is a rear view of the end plate shown in Fig. 7;

Fig. 9 is a plan view of the end plate shown in Fig. 7;

Fig. 10 is a side elevation view in section taken along line 10-10 of Fig. 7;

Fig. 11 is a side elevation view in section taken along line 11-11 of Fig. 7;

Fig. 12 is a side elevation view in section taken along line 12-12 of Fig. 7;

Fig. 13A is a side elevation view showing an example of a spacer incorporated in a closure for cable connection according to the present invention;

Fig. 13B is a front elevation view of the spacer shown in Fig. 13A;

Fig. 13C is a plan view in section taken along line 13C-13C of Fig. 13B;

Fig. 14 is a front elevation view showing a cable clamp which may be incorporated in a closure for cable connection according to the present invention;

Fig. 15 is a plan view of the cable clamp shown in Fig. 14;

Fig. 16A is a side elevation view showing a clamp body of the cable clamp shown in Fig. 14, from which a curved holding member is deleted;

Fig. 16B is a side elevation view of the clamp body shown in Fig. 16A which has a curved holding member incorporated therein;

Fig. 17A is an exploded vertical sectional view showing a curved holding member for a cable which may be incorporated in the cable clamp shown in Fig. 14

Fig. 17B is a side elevation view of the curved holding member shown in Fig. 17A;

Fig. 17C is a plan view of the curved holding member shown in Fig. 17A;

Fig. 18A is a left side elevation view showing a curved holding member for a support wire which may be incorporated in the cable clamp shown in Fig. 14;

Fig. 18B is a front elevation view of the curved holding member shown in Fig. 18A;

Fig. 18C is a right side elevation view of the curved holding member shown in Fig. 18A;

Fig. 18D is a plan view of the curved holding member shown in Fig. 18A;

Fig. 19A is a side elevation view showing a holding spacer for the curved holding member of Fig. 17A which is viewed from a split plane side;

Fig. 19B is a front elevation view of the spacer shown in Fig. 19A;

Fig. 19C is a plan view in section taken along line 19C-19C of Fig. 19B;

Fig. 20 is a front elevation view showing another example of a cable clamp which may be incorporated in a closure for cable connection according to the present invention;

Fig. 21A is a front elevation view showing a clamp body of the cable clamp shown in Fig. 20;

Fig. 21B is a side elevation view of the clamp body;



Fig. 21C is a plan view of the clamp body;

Fig. 22A is a front elevation view showing a curved holding member for a cable or a support wire which may be incorporated in the cable clamp of Fig. 20;

Fig. 22B is a side elevation view of the curved holding member;

Fig. 22C is a bottom view of the curved holding member;

Fig. 22D is a plan view of the curved holding member;

Fig. 22E is a plan view in section take along line 22E-22E of Fig. 22A;

Fig. 23A is a front elevation view showing a holding spacer for a support wire which may be used in the cable clamp of Fig. 20;

Figs. 23B and 23C are respectively left side and right side elevation views of the holding spacer;

Fig. 23D is a plan view of the holding spacer;

Fig. 23E is a sectional view taken along line 23E-23E of Fig. 23A;

Fig. 24A is a front elevation view showing a first spacer member of a holding spacer for a cable which may be used in the cable clamp of Fig. 20;

Figs. 24B and 24C are respectively left side and right side elevation views of the first spacer member;

Fig. 24D is a plan view of the first spacer member;

Fig. 24E is a sectional view taken along line 24E-24E of Fig. 24A;

Fig. 25A is a front elevation view showing a second spacer member of the holding spacer for a cable which may be used in combination with the first spacer member shown in Fig. 24A;

Figs. 25B and 25C are respectively left side and right side elevation views of the second spacer member;

Fig. 25D is a plan view of the second spacer member;

Fig. 25E is a sectional view taken along line 25E-25E of Fig. 25A;

Figs. 26A to 26I are partial front elevation views each showing arrangement of the holding spacers incorporated in the cable clamp;

Fig. 27 is a front elevation view showing a further

example of a cable clamp which may be incorporated in a closure for cable connection according to the present invention;

Fig. 28A is a front elevation view showing a clamp body of the cable clamp shown in Fig. 27;

Fig. 28B is a side elevation view of the clamp body;

Fig. 28C is a plan view of the clamp body;

Fig. 29A is a front elevation view showing a curved holding member for a cable which may be incorporated in the cable clamp of Fig. 27;

Fig. 29B is a side elevation view of the curved holding member;

Fig. 29C is a bottom view of the curved holding member;

Fig. 29D is a plan view of the curved holding member;

Fig. 29E is a plan view in section take along line 29E-29E of Fig. 29A;

Fig. 30A is a front elevation view showing a holding spacer for a support wire which may be used in the cable clamp of Fig. 27;

Figs. 30B and 30C are respectively left side and right side elevation views of the holding spacer;

Fig. 30D is a plan view of the holding spacer;

Fig. 30E is a sectional view taken along line 30E-30E of Fig. 30A;

Fig. 31A is a front elevation view showing a first spacer member of a holding spacer for a cable which may be used in the cable clamp of Fig. 27;

Figs. 31B and 31C are respectively left side and right side elevation views of the first spacer member;

Fig. 31D is a plan view of the first spacer member;

Fig. 31E is a sectional view taken along line 31E-31E of Fig. 31A;

Fig. 32A is a front elevation view showing a second spacer member of the holding spacer for a cable which may be used in combination with the first spacer member shown in Fig. 31A;

Figs. 32B and 32C are respectively left side and right side elevation views of the second spacer member;

Fig. 32D is a plan view of the second spacer member;

Fig. 32E is a sectional view taken along line 32E-32E of

Fig. 32A;

Fig. 33A is a front elevation view showing another example of a holding spacer;

Figs. 33B and 33C are respectively left side and right side elevation views of the holding spacer;

Fig. 33D is a plan view of the holding spacer;

Fig. 33E is a sectional view taken along line 33E-33E of Fig. 33A;

Fig. 34 is a partial exploded perspective view showing arrangement of the holding spacer shown in Fig. 33A;

Fig. 35A is a sectional view showing a sleeve of the closure of Fig. 1 which is kept closed;

Fig. 35B is a sectional view of the sleeve shown in Fig. 35A which is rendered open;

Fig. 36 is an enlarged perspective view showing a hinge of the sleeve of Fig. 35;

Fig. 37 is an enlarged front elevation view showing a fastener of the sleeve of Fig. 35;

Fig. 38 is a perspective view showing a fastener of the sleeve of Fig. 35;

Fig. 39 is an enlarged side elevation view showing the manner of operation of a hinge and a fastener each incorporated in the sleeve of Fig. 35;

Fig. 40A is an enlarged vertical sectional view showing a fastener of the sleeve of Fig. 35 which is kept closed;

Fig. 40B is an enlarged vertical sectional view of the fastener shown in Fig. 35A which is being rendered open;

Fig. 41A is a front elevation view showing a cable tension member clamp; and

Fig. 41B is a plan view of the cable tension member shown in Fig. 41A.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now, a closure for cable connection according to the present invention will be described hereinafter with reference to the accompanying drawings.

Referring first to Figs. 1 to 6, an embodiment of a closure for cable connection according to the present invention

is illustrated. Generally, a closure for cable connection according to the illustrated embodiment includes a cylindrical sleeve constructed of a lower sleeve member 1 and an upper sleeve member 2, as well as end plates 3 respectively fitted in end fitment portions 3<sub>1</sub> provided on opposite ends of the sleeve in a longitudinal direction thereof. The end plates 3 are each adapted to permit at least one trunk optical fiber cable 10 to pass therethrough. The closure of the illustrated embodiment also includes at least one cable clamp 4 for securing the trunk optical fiber cable 10 with respect to the closure and at least one tension member holder 5 which is adapted to have a tension member (not shown) of the cable 10 connected thereto. The lower and upper sleeve members 1 and 2 of the cylindrical sleeve are each made of a synthetic resin material such as, for example, PP resin, flame-retardant FRPP resin filled with glass fiber, a thermoplastic elastomer or the like with a semicylindrical shape and joined to each other so as to be vertically separable from each other, resulting in providing the cylindrical sleeve. For this purpose, the lower and upper sleeve members 1 and 2 have abutting joint surfaces formed on both sides thereof, respectively, through which the sleeve members 1 and 2 are joined together. The end plates 3 respectively fitted in the end fitment portions 3<sub>1</sub> provided on both ends of the thus-formed cylindrical sleeve may each be made of a suitable rubber plate material such as an EPDM plate material or the like which satisfactorily exhibits desired properties such as weatherability, ozone resistant properties and the like.

The abutting joint surfaces of each of the lower and upper sleeve members 1 and 2, including a portion thereof adapted to be brought into contact with an outer periphery of each of the end plates 3, are provided thereon with recessed grooves 6 in a manner to extend in a longitudinal direction thereof or in an axial direction of the sleeve, in which gaskets 7 are fittedly held as shown in Fig. 1. The sleeve is provided therein with the cable clamp 4 in a manner to be opposite to one of the end plates 3. The cable clamp 4 includes curved holding members 17 each of which is adapted to conform to an outer periphery of the cable. Also, the sleeve is provided therein with a connection fitment 8

including the tension member holder 5 and at least one tension member connector 9.

The gasket 7 fitted in each of the recesses 6 on both sides of the lower and upper sleeve members 1 and 2 is made of an elastic material such as a rubber material or the like and formed with an elliptic configuration in cross section. The gasket 7 is arranged in the recess 6 while being compressed in such a manner that a major axis of a cross section of the gasket 7 is rendered perpendicular to the abutting joint surface of the sleeve member or a width direction of the recess 6. This results in sealing between the lower sleeve member 1 and the upper sleeve member 2 being provided.

The recesses 6, as shown in Figs. 4 to 6, are each so formed that both ends thereof are reduced in width, to thereby provide a gasket press-fit portion 6<sub>1</sub> for pressedly fittedly holding the gasket 7 therein. Thus, fitting of the gasket in each of the recesses 6 is carried out by pressedly fitting both ends of the gasket 7 in the gasket press-fit portions 6<sub>1</sub> of the recess 6 while elongating it, to thereby provisionally or temporarily fix the gasket 7 in the recess 6. This results in fitting of the gasket 7 in the recess 6 being positively accomplished while preventing undesired missing of the gasket 7 from the recess 6 and leaning of the gasket 7. The gasket 7 may be provided on each of both ends thereof with a flange 7<sub>1</sub> as required. The flanges 7<sub>1</sub> may be pressedly abutted against outer ends of the lower and upper sleeve members 1 and 2, to thereby temporarily fix the gasket 7 in the recess 6.

Also, the upper sleeve member 2 and lower sleeve member 1 are each provided with barriers 65 at different portions thereof defined along the recesses 6 and on both side edges thereof deviated from each other in a longitudinal direction thereof. During assembling of both sleeve members 1 and 2 into the sleeve, the sleeve members are joined together while mutually abutting the barriers 65 of each of the sleeve members against an inner surface of the other sleeve member, resulting in deviation of the upper and lower sleeve members 2 and 1 from each other in a horizontal direction thereof being effectively prevented.

The upper and lower sleeve members 2 and 1 are vertically

separably joined to each other while interposedly sealedly holding the gaskets 7 therebetween and interposedly arranging sealing members between the sleeve members and the end plates 3, resulting in ensuring airtightness in the closure. The upper and lower sleeve members 2 and 1 are integrally connected to each other through the abutting joint surfaces thereof using fixing or fastening means. More specifically, the upper and lower sleeve members 2 and 1 are integrally connected together by means of hinges 60 each formed of a loop-like ring 61 and fasteners 70 each formed of a loop-like ring 71. The loop-like rings 61 and 71 are each arranged so as to releasably fasten the sleeve members 1 and 2 to each other.

Also, the cable clamp 4 is mounted on each of both ends of the connection fitment 8 fixed with respect to the lower sleeve member 1 while being rendered opposite to an inner surface of one of the end plates 3 and then the tension member clamp 5 are mounted on the connection fitment 8 by means of fixing screws. This results in ensuring distribution and guide of fiber cables for connection thereof. Also, the sleeve is provided therein with at least one fiber cable storage unit such as, for example, at least one storage tray 15 so as to be positioned at a middle portion thereof. Also, the sleeve is mounted thereon with the tension member connectors 9 as shown in Figs. 1, 3 and 4.

Each of the end plates 3, as shown in Figs. 7 to 12, is constructed of a rubber elastic material of a round shape such as an elliptic shape, a prolonged oval shape, a circular shape or the like and formed with at least one cable insertion or guide hole 20. In the illustrated embodiment, four such cable guide holes 20 are provided. The cable guide holes 20 may be formed with the same diameter or different diameters. The end plates 3 are each provided thereon with caps 21 of a reduced wall thickness for covering the respective cable guide holes 20. The caps 21 are each arranged on the end plate 3 in a manner to be capable of being removed by cutting from the end plate 3. Also, the end plates 3 are each formed with slits 22 in a manner to correspond to the cable guide holes 20, respectively. The slits 22 are each so arranged that one end thereof communicates with the corresponding cable guide hole 20 and the other end thereof

extends to a portion of the end plate 3 in proximity to the outer periphery thereof. Also, the slits 22 are each arranged so as to obliquely extend in a direction inclined with respect to a horizontal direction. The slits 22 are each closed on one side thereof and at an outer periphery thereof with thin wall elements 22<sub>1</sub> and 22<sub>2</sub>, respectively, when the cable 10 is not inserted through the cable guide hole 20 corresponding thereto. When the cable 10 is inserted through the cable guide hole 20, the cap 21 for covering the hole 20 is removed by cutting and the thin wall elements 22<sub>1</sub> and 22<sub>2</sub> of the end plate 3 are cut open along the slit 22, resulting in an end of the slit 22 being enabled to be widely opened. This permits workability of cable connection and airtight properties thereof to be significantly enhanced.

Each of the slits 22 and each of the cable guide holes 20 which do not have a cable inserted therethrough are removably fitted therein with a rigidity holding seal member 25<sub>1</sub> and a rigidity holding member 25, respectively. Also, each of the end plates 3 is formed on both lateral sides thereof with a pair of recesses 23. The recesses 23 are each securely fitted therein with an opening prevention connection member 24, which is arranged so as to vertically extend over both sides of each slit 22, to thereby prevent opening of the end plate 3. The end plate 3 is also formed at a central portion thereof interposed between the cable guide holes 20 in two pairs with a recess 28, which is securely fitted therein with a rigidity holding member 29, which is arranged so as to be abutted against an end wall of the sleeve. The connection member 24 fitted in each of the recesses 23 functions as an opening prevention fitment for preventing opening of the outer periphery of the end plate 3 and displacement thereof, when the slit 22 is cut open or expanded to insert the cable 10 through the cable guide hole 20 and then closed again. The opening prevention connection members 24 and rigidity holding member 29, which are respectively held in the recesses 23 and 28 formed on an outer surface of the end plate 3, are provided on surfaces thereof facing the end plate 3 with mating engagements 24<sub>2</sub> and 29<sub>2</sub>, respectively. The mating engagements 24<sub>2</sub> and 29<sub>2</sub> respectively engage with recesses 24<sub>1</sub> and 29<sub>1</sub> formed on the end plate 3, to thereby function to positively

hold the members 24 and 29 on the end plate 3, so that the members may be substantially prevented from being released therefrom.

Insertion of the cable through the end plate 3 is carried out by removing the rigidity holding member 25 from the cable guide hole 20 through which the cable is to be inserted, selectively removing the thin-wall cap 21 by cutting from the cable guide hole 20 to open the hole 20, cutting the thin wall elements 22<sub>1</sub> and 22<sub>2</sub> of the end plate 3 to the outer periphery of the slit 22 along the slit 22 communicating with the cable guide hole 20, to thereby enable an outer end of the slit 22 to be widely opened, and then laterally inserting the cable 10 through the opened slit 22 toward the cable guide hole 20. Then, the cable is inserted through the cable guide hole 20, to thereby cause the slit 22 to be returned to the original configuration, into which the seal member 25<sub>1</sub> is inserted, followed by adhesion of the seal member 25<sub>1</sub> to the slit 22 by means of an adhesive as required. Then, the opening prevention connection member 24 is mounted in the recess 23, so that both sides of the end plate 3 with the slit 22 being interposed therebetween are fastened. When the end plate 3 is formed with a small size, it is not necessarily required to arrange the rigidity holding member 25. Also, when the end plate 3 is provided with one or two such cable guide holes 20 in a manner to be positioned on a horizontal central line thereof, the slits 22 may be provided along the horizontal central line.

Further, the end plates 3 are each provided on an outer peripheral surface thereof with a plurality of peak-and-valley shaped grooves 26 in a manner to extend in a circumferential direction thereof, to thereby permit compression force to be produced between the inner surface of the sleeve and the end plate 3, resulting in airtightness of the closure being enhanced. Also, such construction permits the compression force to be inwardly transmitted, to thereby provide satisfactory airtightness between the cable 10 and the end plate 3 at a cable lead-out hole or at the cable guide hole 20 thereof. In addition, an adhesive tape-like gasket 11 made of an unvulcanized butyl rubber material is arranged locally between the outer



periphery of the end plate 3 and an inner surface of the end fitment portion 3<sub>1</sub> of the sleeve so as to cover an outer end portion of the slit 22 positioned contiguous to the outer periphery of the end plate 3. The tape-like gasket 11 is provided by adhesion thereof to the outer periphery of the end plate 3 while being conformed to the outer periphery of the end plate 3 including the peak-and-valley shaped grooves 26. Thus, airtightness between each of the end fitment portions 3<sub>1</sub> of the sleeve and the end plate 3 is held in such a manner that fastening force generated by the fasteners 70 is received by the upper and lower sleeve members 2 and 1 and then transmitted therefrom to the peak-and-valley shaped grooves 26 formed on the outer peripheral surface of the end plate 3. This results in workability in assembling and disassembling of the closure of the illustrated embodiment being highly enhanced without any separate end plate gasket being required.

The end plate 3 is provided on the inner surface thereof with a holder 31 in order to accomplish securer arrangement of the end plate 3 and prevent deformation of the end plate 3 due to application of any external force thereto. For this purpose, the holder 31 is formed with a recess 30 in which a projection 40 provided on the cable clamp 4 is fitted, as shown in Fig. 8.

Also, the end plate 3 is constructed so as to be accommodated to cables of different diameters. To this end, a spacer 43 made of a rubber or resin material is used for adjusting a diameter of the cable guide hole 20 of the end plate 3 depending on a diameter of a cable to be inserted therethrough. Alternatively, an airtight tape may be used for this purpose. The spacer 43 or airtight tape is wound on the cable 10, resulting in ensuring intimate contact of an outer peripheral surface of the cable 10 with an inner peripheral surface of the through hole formed from the cable guide hole 20.

The spacer 43 arranged on the periphery of the cable led out of the sleeve, as shown in Figs. 13A to 13C, is formed with a hollow cylindrical shape and provided on one side thereof with a slit 44 for cable insertion, resulting in the spacer 43 being permitted to open on the one side thereof. Also, the spacer 43 is provided on inner and outer surface thereof with annular

grooves 46 and 45 of a peak-and-valley shape, respectively, to thereby ensure satisfactory airtightness of the spacer 43 and facilitate assembling and disassembling of the spacer 43 with respect to the cable 10.

The spacer 43 is placed in a natural environment, therefore, it is constructed of a rubber material or the like which is shrinkable or expandable depending on an environmental temperature, to thereby minimize a variation in pressure between the outer periphery of the end plate 3 and the sleeve and between an inner periphery of the cable guide hole and an outer periphery of the cable, resulting in providing satisfactory compression force and preventing shrinkage due to a decrease in temperature. In order to ensure that the cable guide hole 20 of the end plate 3 permits cables 10 of different diameters to be selectively inserted therethrough without changing a diameter of the cable guide hole 20, a plurality of spacers 43 may be prepared by forming an outer diameter thereof the same as a diameter of the cable guide hole 20 and inner diameters thereof in correspondence to respective outer diameters of the cables.

In using an airtight tape for sealing between the cable guide hole 20 and the outer periphery of the cable 10, the airtight tape may be made of a rubber material of a low hardness which has a Shore hardness (Hs) of 0 to 30 and which exhibits a large elongation and a large tensile stress or modulus. Such a rubber material may be made of a thermoplastic rubber composition, such as an EPDM material, a silicone rubber material, a butyl rubber material, a styrene-butadiene rubber material, a fluororubber material or the like, which exhibits a penetration of 40 to 90, preferably 50 to 70 ( $10^{-1}$  mm, as measured according to the Japanese Industrial Standard (JIS) K 2560), an elongation of 1500 to 2000 percent, preferably 1700 to 1900 percent (JIS K 6301), and tensile stresses of 100%-0.5 kgf/cm<sup>2</sup>, 300%-1.0 kgf/cm<sup>2</sup> and 400%-1.4 kgf/cm<sup>2</sup> (JIS K 6301). More particularly, the rubber material may have a specific gravity of 1.0 to 1.05, a tensile strength of 31.0 kgf/cm<sup>2</sup> and a compression set of 63.0 % (70°C x 22 hrs.). The airtight tape made of such a rubber material of low hardness can be elastically deformed in conformity with the outer peripheral surface of a cable jacket or

462120 00466280

a support wire which has linear protrusions or irregularities formed thereon so that the airtight tape can be brought into intimate contact with the outer peripheral surface without any gap, resulting in satisfactory sealing being provided.

The cable clamp 4, as shown in Figs. 14 to 19C, includes a clamp body 4<sub>1</sub> formed with a plurality of cable guide recesses 16 and the curved holding members 17 are each detachably and pivotally mounted on the clamp body 4<sub>1</sub> by means of a pin 18 in a manner to be opposite to a corresponding one of the recesses 16. The curved holding members 17 are each formed with a shape which permits it to surround the outer periphery of the cable 10 in cooperation with a corresponding one of the recesses 16. The curved holding member 17 is then secured or fastened to the clamp body 4<sub>1</sub> of the cable clamp 4 by means of a screw 19 acting as a fastening member to hold the cable in a manner to interpose it between the clamp body 4<sub>1</sub> and the curved holding member 17. Thus, it will be noted that the cable clamp 4 facilitates clamping of the cable. More particularly, the curved holding member 17 which is arranged opposite to a corresponding one of the cable guide recesses 16 is constructed into an arm-like member which is provided at one end thereof with the pin 18 for enabling pivotal movement of the member 17 and at the other end or free end 17<sub>1</sub> thereof with a screw insertion hole 17<sub>2</sub> through which the screw 19 is inserted. The pin 18 is provided with two surfaces parallel to each other and detachably fitted in a release prevention mechanism provided at the clamp body 4<sub>1</sub>, resulting in the pin 18 being pivotally supported on the clamp body 4<sub>1</sub> of the cable clamp 4. In the illustrated embodiment, the release prevention mechanism is provided by holding recesses 18<sub>1</sub> each formed with a narrow opening which permits the two parallel surfaces of the pin 18 to be inserted therethrough into the holding recess 18<sub>1</sub>. The fastening member or screw 19 for fastening each of the curved holding members 17 is threadedly fitted in a pivotal element 19<sub>1</sub> pivotally supported on the clamp body 4<sub>1</sub> of the cable clamp 4 and has a head 19<sub>2</sub> thereof held on the free end 17<sub>1</sub> of the curved holding member 17.

Also, the cable guide recess 16 and curved holding member 17 are provided on an inner surface thereof with a plurality of

annular projections 18<sub>2</sub> and 17<sub>3</sub>, respectively, resulting in recesses 37 being provided, in which recesses 37 holding spacers 33 adapted to be pressedly abutted against a jacket of a cable are detachably fitted. The holding spacers 33 are each constructed of an arcuate element which is formed on an arcuate inner peripheral surface thereof with grooves 38 of a peak-and-valley shape and on an outer peripheral surface thereof with a flange 32. The holding spacer 33 is provided on the outer peripheral surface thereof with a projection 34. The holding spacers 33 are each detachably fitted in the recess 37 of the cable guide recess 16 or that of the curved holding member 17 while the projection 34 is fitted in a hole 36 formed in the cable guide recess 16 or curved holding member 17.

With reference to Figs. 20 to 29, another example of a cable clamp 4 will be described below. In this illustrated example, the cable clamp 4 includes a clamp body 4<sub>1</sub> formed with cable guide recesses 16 and curved holding members 17. The cable guide recesses 16 and curved holding members 17 are provided with mating or fitting surfaces 16<sub>1</sub> and 17<sub>4</sub>, respectively, on which respective mating surfaces 33<sub>1</sub> formed on holding spacers 33 are slidably fitted, resulting in the holding spacers 33 in pairs being detachably mounted in the cable guide recesses 16 and curved holding members 17 so as to face each other. The curved holding members 17 are each fastened to the clamp body 4<sub>1</sub> of the cable clamp 4 through a screw 19.

The holding spacers 33, as shown in Figs. 23A to 23E, are each formed on opposite ends thereof with a pair of arcuate concave surfaces 54 and 55 of different curvatures which are adaptable to outer peripheries of cables having different diameters and which are curved in opposite directions. The arcuate concave surfaces 54 and 55 of the holding spacer 33 are each provided thereon with a plurality of ribs 57 which are projectedly arranged at intervals and which extend in a direction perpendicular to an axis of the cable. Each of the holding spacers 33 thus constructed is mounted on the clamp body 4<sub>1</sub> or one of the curved holding members 17 while a distance piece 56 of a suitable thickness is, as required, interposed between the holding spacer 33 and the clamp body 4<sub>1</sub> or curved holding member

17.

Alternatively, as shown in Figs. 24, 25 and 26A to 26F, holding spacers 33 may each be constructed of a first spacer member 33a and a second spacer member 33b which are detachably joined together through at least one arcuate surface formed thereon in correspondence to an outer periphery of a cable. In this instance, the first spacer member 33a is provided at one end thereof with an arcuate concave surface 54 of a small radius and provided at the other end thereof with an arcuate concave surface 55 of a large radius which is curved in an opposite direction and which is formed therein with a pair of fitting holes 39. The arcuate concave surfaces 54 and 55 of the first spacer member 33a are provided thereon with a plurality of ribs 57 projected therefrom. The second spacer member 33b is provided at one end thereof with an arcuate convex surface 41 which conforms with the arcuate concave surface 55 of the first spacer member 33a and which is provided thereon with a pair of connection rods 42 adapted to be fitted in the respective fitting holes 39 of the first spacer member 33a. The second spacer member 33b is also provided at the other end thereof with an arcuate concave surface 52 of an intermediate radius. The arcuate convex surface 41 is formed thereon with a plurality of grooves 58 into which the ribs 57 of the first spacer member 33a are fitted. Such a construction of the holding spacer which comprises a plurality of spacer members 33a and 33b can be widely applied to various cables of different diameters.

As described above, the holding spacer 33 formed on both ends thereof with the arcuate surfaces 54 and 55 in correspondence to the outer peripheries of the cables permits each of the arcuate surfaces to be used for a cable of a large diameter or that of a small diameter with a suitable distance piece 56 being selectively interposed. Furthermore, in the cable guide recess 16 of a large radius, the holding spacer 33 including the first and second spacer members 33a and 33b which are detachably joined together through the arcuate surfaces 41 and 55 thereof may be selectively used, the first spacer member 33a is mounted in the cable guide recess 16 alone or in combination with the second spacer member 33b depending on a diameter of the

cable, as shown in Figs. 26A to 26I. As a result, such a holding spacer can widen the range of applicability thereof to cables of various diameters.

The fitting or mating surfaces 16<sub>1</sub>, 17<sub>4</sub> and 33<sub>1</sub> may be formed to have a plurality of linear protrusions which extend in parallel with an axis of the cable, or alternatively, to have triangular-shaped teeth, corrugations or serrated protrusions, so that mounting or replacement of the holding spacers 33 or spacer members 33a and 33b can be readily carried out. The fitting surfaces 16<sub>1</sub>, 17<sub>4</sub> and 33<sub>1</sub> thus constructed facilitate adjustment of a position of each of the holding spacers 33 in a radial direction with respect to the cable and can eliminate a distance piece 56 unlike the aforementioned embodiments.

As shown in Figs. 33A to 34, the clamp body 4<sub>1</sub> of the cable clamp 4 may be provided at one end of each fitting surface 16<sub>1</sub>, into which the holding spacer 33 is slidably fitted, with a pair of loosening prevention pieces 4<sub>2</sub> so as to form a gap therebetween. The holding spacer 33 is projectedly formed at one end thereof with a pair of engagement pawls 33<sub>2</sub>. The pawls 33<sub>2</sub> are inserted through the gap between the loosening prevention pieces 4<sub>2</sub> and then a stopper 53 is fitted into between the pawls 33<sub>2</sub> so as to fix the pawls 33<sub>2</sub> to the loosening prevention pieces 4<sub>2</sub>, resulting in the holding spacer 33 being prevented from coming out.

Now, the hinges 60 and fasteners 70 will be more detailedly described with reference to Figs. 35A to 40B.

One of the sleeve members 1 and 2 or the lower sleeve member 1 is formed at a portion thereof in proximity to one of the side edges thereof with a plurality of ring receiving projections 63 in a manner to be spaced from each other in a longitudinal direction thereof. In each of the ring receiving projections 63, a hinge member comprising the loop-like ring 61 is pivotally arranged. Also, the lower sleeve member 1 is provided at a portion thereof in proximity to the other side edge thereof with a plurality of fastener receiving projections 73<sub>1</sub> in a manner to be spaced from each other in the longitudinal direction thereof. Further, the other or upper sleeve member 2 is provided at a portion thereof in proximity to one of the side

edges thereof with a plurality of holding projections 63<sub>1</sub> in a manner to be spaced from each other in correspondence to the hinge members 61 and at a portion thereof in proximity to the other side edge thereof with a plurality of ring receiving projections 73 in correspondence to the fastener receiving projections 73<sub>1</sub>. The loop-like rings 71 are each pivotally movably arranged in a corresponding one of the ring receiving projections 73. The loop-like ring 71 is pivotally mounted thereon with an operation lever 75 provided at a distal end thereof with a holding projection 74.

The fasteners 70 arranged on one side of the lower and upper sleeve members 1 and 2, as shown in Fig. 39, each include the loop-like ring 71 made of a metal rod and fitted in a ring insertion recess 72 formed at the ring receiving projection 73 provided on one side edge of the upper sleeve 2, the pivotable operation lever 75 provided with the holding projection 74, and a holding recess 72<sub>1</sub> formed at the fastener receiving projection 73<sub>1</sub> provided on one side edge of the lower sleeve member 1. The holding projection 74 of the operation lever 75 is disengageably held in the holding recess 72<sub>1</sub>, to thereby act as a supporting point. Also, the hinges 60, as shown in Fig. 36, each include a the loop-like ring 61 made of a metal rod and pivotally arranged in a ring insertion portion 62 formed at the ring receiving projection 63 provided on the other side edge of the lower sleeve member 1 and a ring holding recess 62<sub>1</sub> which is formed at the hinge holding projection 63<sub>1</sub> of the upper sleeve member 2 and in which the other end of the loop-like ring 61 is detachably held. Such construction of the hinge 60 and fastener 70 facilitates connection and disconnection between the lower sleeve member 1 and the upper sleeve member 2.

In addition, the loop-like rings 61 and 71 of the hinge 60 and fastener 70 arranged on the opposite ends of the sleeve in the longitudinal direction thereof are each movably provided with a retaining member 77 along an outer side of each of the gaskets 7 so as to be fitted in a recess 76 formed by chamfering outer side edges of the abutting joint surfaces of the lower and upper sleeve members 1 and 2. The retaining member 77 may be constructed of, for example, a ring rod. Such construction, when

a sticky sealant is charged between the abutting joint surfaces of the sleeve members 1 and 2, effectively prevents runout of the sealant.

Reference numeral 64 designates stoppers each arranged in the vicinity of the ring receiving projection 63 of the lower sleeve member 1. The stoppers 64 each function to hold the loop-like ring 61 of the hinge 60 at a predetermined pivotal angle about the ring insertion portion 62. Mounting of the upper sleeve member 2 to the hinges 60 is carried out by abutting the loop-like ring 61 against the stopper 64 to keep the loop-like ring 61 from being pivotally moved and then placing the upper sleeve member 2 on the lower sleeve member 1. Then, the upper sleeve member 2 is raised about the gasket 7 positioned on a side of the hinges 60 to engage a free end of the loop-like ring 61 with the ring holding recess 62<sub>1</sub> of the ring holding projection 63<sub>1</sub>. This results in a plurality of the loop-like rings 61 being concurrently engaged with the ring holding recesses 62<sub>1</sub>, so that the lower and upper sleeve members 1 and 2 may be joined on one side thereof to each other through the hinges 60 by a one-touch operation. Then, the sleeve members 1 and 2 are joined on the other side thereof to each other by means of the fasteners 70, as shown in Fig. 39.

The stopper mechanism for the hinges 60 may be constructed of end surfaces of the sleeve members 1 and 2 rendered opposite to each other when both side edges of the members 1 and 2 are aligned with each other, rather than or in place of the above-described stoppers 64. For this purpose, the end surfaces may each be partially formed into an outwardly downwardly slanting surface portion, so that an angle  $\theta$  of 30 to 90 degrees may be defined between both slanting surface portions and therefore between both end surfaces. The end surfaces thus formed permit the slanting surface portions to be abutted against each other, to thereby function as the stopper mechanism, when both sleeve members 1 and 2 are relatively rotated in a direction of opening thereof. This results in an angle of opening of the sleeve members 1 and 2 being restricted to a range of between 30 degrees and 90 degrees. Such setting of the opening angle of the sleeve members 1 and 2 to the range substantially prevents



excessive leaning of the upper sleeve member 2 toward a side opposite to that on which working takes places, to thereby ensure satisfactory workability.

In order to ensure that the loop-like rings 61 and 71 of the hinge 60 and fastener 70 are used in a way common to both, the ring insertion portion 62 and ring holding recess 62<sub>1</sub> of the hinge 60 may be constructed in substantially the same manner as the ring insertion portion 72 and also, holding recess 72<sub>1</sub> of the fastener 70; and also, the ring receiving projection 63 and ring holding projection 63<sub>1</sub> of the hinge 60 may be constructed in substantially the same manner as the ring receiving projection 73 and fastener receiving projection 73<sub>1</sub> of the fastener 70. This leads to simplification of a molding die for the sleeve members 1 and 2. Also, the loop-like ring 61 and loop-like ring 71 may be constructed in substantially the same manner, resulting in being used commonly on both side edges of the sleeve.

The tension member holder 5, as shown in Figs. 41A and 41B, is mounted thereon with a cable tension member clamp 51 of the single hole type or multi-hole type, which includes one or more cable insertion portions provided on a mount plate 49 through one or more arms 48. The cable tension member clamp 51 is secured in the lower sleeve member 1 to hold the tension member of the cable. For example, the cable tension member clamp 51 arranged in the sleeve member 1, as shown in Figs. 41A and 41B, may be constructed in such a manner that one or more insertion members 47 through which tension members are fittedly inserted are mounted on the mount plate 49 through the arm or arms 48. The insertion members 47 are each provided with a fastening screw 50. The cable tension member clamp 51 thus constructed is mounted on the tension member holder 5 to thereby facilitate application of tension to a center of one or more cables.

Either the sleeve member 1 or 2 or the end plate 3 may be provided with a valve-equipped gas inlet (not shown), through which sealing gas is charged into the closure to ensure protection of the cable connection section in the closure.

Now, the manner of assembling of the closure for cable connection according to the illustrated embodiment thus

constructed will be described hereinafter.

A jacket is removed by a required length from each of the cables 10 and an internal slot rod is cut off by a predetermined dimension from a position of the cable at which removal of the jacket was carried out, followed by adjusting of tension members in a predetermined dimension, resulting in preliminary arrangement for cable connection being completed. Then, the jacket at a predetermined position of each cable 10 is subjected to polishing and cleaning in a circumferential direction thereof and the spacer 43 is fitted on the cable 10 or the airtight tape is wound on the cable 10. The rigidity holding members 25 and 25<sub>1</sub> are respectively removed from the cable guide hole 20 and slit 22 of each of the end plates 3 and then the thin-wall cap 21 and thin walls 22<sub>1</sub> and 22<sub>2</sub> of the end plate 3 are respectively removed from the end plate 3 by cutting to open the cable guide hole 20 and slit 22. Then, the slit 22 is expanded to guide the cable 10 through the expanded slit 22 to the cable guide hole 20, to thereby insert the cable 10 through the hole 20. Subsequently, the slit 22 of the end plate 3 is mounted therein with the rigidity holding seal member 25<sub>1</sub> and then fitted therein with the opening prevention connection member 24, to thereby close the slit 22, followed by adhesion of the adhesive tape-like gasket 11 to the outer periphery of the end plate 3 so as to cover the outer end portion of the slit 22 positioned contiguous to the outer periphery while being conformed to the outer periphery of the end plate 3. Thereafter, the holding spacers 33 having an inner diameter required for the cable clamp 4 are fitted in the cable guide recess 16 and curved holding member 17 to fasten the jacket at the end of the cable 10 to the cable clamp 4 by tightening the screw 19 at torque of a predetermined level and to fasten the tension members to the cable tension member clamp 51 of the tension member holder 5 by fastening the screws 50 at torque of a predetermined level. Then, the gaskets 7 are interposedly arranged between the abutting joint surfaces of the lower and upper sleeve members 1 and 2, and the upper sleeve member 2 is pivotally moved about each of the hinges 60 on one side of the lower sleeve member 1 while being kept held on the lower sleeve member 1 by means of the hinges 60, resulting in the

upper sleeve member 2 being placed on the lower sleeve member 1 while forcing the end plates 3 against the lower sleeve member 1, so that the abutting joint surfaces of the lower and upper sleeve members 1 and 2 may be abutted against each other. Then, the fasteners 70 are fastened in order from a central portion of the sleeve members to end portions thereof, to thereby provide the sleeve. As required, the sleeve thus provided may be wound thereon with bands to keep airtightness over a whole length thereof, to thereby exhibit airtightness with high reliability.

In the closure of the illustrated embodiment thus assembled, the gaskets 7 are each kept compressed in a major axis direction thereof between the abutting joint surfaces of the lower and upper sleeve members 1 and 2, resulting in the closure exhibiting increased airtightness at relatively reduced clamping force. Also, the spacer 43 or airtight tape is interposedly arranged in an axial direction of the cable 10 between the end plate 3 and the cable 10 so as to act as a seal material, to thereby stabilize a posture of the sleeve members 1 and 2, facilitate assembling of the sleeve and enhance airtightness of the sleeve. The gasket 7 is formed with an elliptic shape in section and arranged in the recesses 6 of the lower and upper sleeve members 1 and 2 while conforming a major axis thereof to a direction of clamping force between the sleeve members so as to attain a lip seal effect, so that assembling of the closure may be facilitated and airtightness thereof may be increased.

Now, the manner of disassembling of the closure will be described hereinafter.

First, the operation lever 75 of each of the fasteners 70 is pivotally moved to disengage the holding projection 74 thereof from the fastener receiving projection 73<sub>1</sub> to release connection between the lower sleeve member 1 and the upper sleeve member 2, so that the upper sleeve member 2 may be readily pivotally moved about the hinges 60 for opening of the sleeve. Then, the opening prevention connection members 24 are removed from each of the end plates 3, followed by separation of the sleeve members 1 and 2 from each other, so that replacement of the cable 10 may be readily carried out.

As described above, connection or fastening between the

abutting joint surfaces of the lower and upper sleeve members 1 and 2 while ensuring intimate contact therebetween may be attained by means of the hinges 60 on one of both sides of the sleeve members and the fasteners 70 on the other side thereof, resulting in workability being significantly improved. Also, rotation or pivotal movement of the upper sleeve member 2 about the hinges 60 in a closing direction thereof permits the gasket 7 in the recess 6 of the lower sleeve member 1 on the side of the hinges 60 to be automatically received in the recesses 6 of the upper and lower sleeve members 1 and 2 opposite to each other. The hinges 60 may be arranged on the upper and lower sleeve members 1 and 2 either securely or detachably.

The storage tray 15 for the fiber cable storage unit described above may be arranged in a stationary manner for every one optical fiber ribbon so as to realize mounting of 5 to 20 ribbons per one tray. In this instance, it is desirable that such storage trays are superposed in a multistage manner and connected together by the hinges so as to permit a tray at a position required to be open, to thereby improve workability.

The illustrated embodiment is constructed so as to carry out connection and fastening between the sleeve members on only one side of the sleeve. Such construction, even when a sufficient working space cannot be ensured on the other side of the sleeve, permits an assembling operation of the closure to be readily executed so long as a working space is maintained on the worker's side (the one side of the sleeve). When the sleeve members 1 and 2 which are connected together by means of the hinges 60 and fasteners 70 are rendered open with respect to each other, the stopper mechanism provided for each of the hinges 60 restricts an angle of opening between both sleeve members 1 and 2. Thus, relative pivotal movement of both sleeve members in a direction of opening thereof is limited to a predetermined angle, resulting in eliminating a disadvantage of causing one of the sleeve members to be excessively open when the other sleeve member is engaged with the connection section, to thereby be pivotally moved toward a side opposite to a working side, leading to a deterioration in workability.

Also, in the closure of the illustrated embodiment, the

lower and upper sleeve members 1 and 2 are constructed into substantially the same configuration, so that mounting of fastener members and hinge members for connection between both sleeve members may be carried out without paying attention to discrimination between both sleeve members. Also, this permits both sleeve members to be produced by means of a single molding die.

The sleeve members may each be formed on both inner and outer surfaces thereof with a corrugated shape and made of a material exhibiting satisfactory compression set such as a styrene or olefin thermoplastic elastomer material. Such construction permits manufacturing of the sleeve to be readily accomplished at a reduced cost and facilitates recovery and recycling of the sleeve because of any vulcanizing treatment being eliminated.

As can be seen from the foregoing, the closure for cable connection according to the present invention permits the sleeve members to be safely fastened to each other by means of the fasteners while abutting the abutting joint surfaces of the sleeve member against each other, resulting in facilitating both an operation of joining the sleeve members together and an operation of protecting the cable connection section, as well as ensuring satisfactory sealing with increased reliability due to uniform pressing against the end plates while minimizing the number of locations at which fastening is carried out. Also, it ensures simplified handling of the closure and facilitates assembling and disassembling thereof while keeping a posture of the sleeve stable. Furthermore, it permits a limited number of components to be widely applied to various cables of different diameters and to positively fix them in the closure, to thereby reduce necessary time to assemble or disassemble the closure, as well as to eliminate troubles in keeping or handling of the components for installation or maintenance, so that a closure for cable connection having a simplified structure can be produced at a reduced cost.

While a preferred embodiment of the invention has been described with a certain degree of particularity with reference to the drawings, obvious modifications and variations are

possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described.

What is claimed is:

1. A closure for cable connection comprising:

a pair of sleeve members formed with a semicylindrical shape and joined to each other in a manner to be vertically separable from each other, resulting in providing a cylindrical sleeve which surrounds a cable connection section, said sleeve members each having abutting joint surfaces formed on both sides thereof, through which said sleeve members are joined together;

end plates arranged on opposite ends of said sleeve and each formed with at least one cable guide hole through which a cable connected to said cable connection section is inserted;

hinges and fasteners releasibly hooked between said sleeve members to integrally connect said sleeve members to each other through said abutting joint surfaces arranged opposite to each other;

said end plates each being formed with a slit in a manner to extend from said cable guide hole to a portion of said end plate in proximity to an outer periphery of said end plate so as to permit a wall of said end plate to open by cutting along said slit;

said cable guide hole being provided thereon with a thin-wall cap capable of being removed by cutting and said slit being detachably fitted therein with a rigidity holding member; and

an adhesive tape-like gasket interposed between said outer periphery of said end plate and an inner surface of said sleeve so as to cover an outer end of said slit.

2. A closure for cable connection as defined in claim 1, wherein said end plate is removably fitted therein with at least one opening prevention connection member which extends over both sides of said slit; and

said end plate is removably fitted therein with a second rigidity holding member in a manner to be positioned at a central portion thereof between the cable guide holes and abutted against an end wall of said sleeve.

3. A closure for cable connection as defined in claim

1, wherein said cable guide hole of said end plate is detachably fitted therein with a third rigidity holding member.

4. A closure for cable connection as defined in claim 1, further comprising at least one cable clamp arranged opposite to one of said end plates and provided with at least one cable insertion portion through which the cable is fittedly inserted; wherein

said cable clamp includes a clamp body formed with at least one cable guide recess and a pivotal support;

at least one curved holding member is arranged opposite to said cable guide recess and pivotally supported by said pivotal support;

said curved holding member is fastened at a free end thereof to said clamp body of said cable clamp by means of a mounting member; and

said cable guide recess and curved holding member are detachably provided with holding spacers in a manner to be opposite to each other, respectively.

5. A closure for cable connection as defined in claim 2, wherein said opening prevention connection member and second rigidity holding member are fitted in respective recesses formed on an outer surface of said end plate and provided on surfaces thereof opposite to said end plate with mating engagements, respectively.

6. A closure for cable connection as defined in claim 4, wherein said opening prevention connection member and second rigidity holding member are fitted in respective recesses formed on an outer surface of said end plate and provided on surfaces thereof opposite to said end plate with mating engagements, respectively.

7. A closure for cable connection as defined in claim 4, wherein said end plate is provided on an inner surface thereof with a holder in a manner to be projected therefrom, said holder being formed with a recess; and

said cable clamp is provided with a projection adapted to fit in said recess of said holder.

8. A closure for cable connection as defined in claim



4, wherein said curved holding member of said cable clamp is constructed in the form of an arm-like member which is provided at one end thereof with a pivotal pin for enabling pivotal movement of said curved holding member and at the other end thereof acting as a free end thereof with an insertion hole for said mounting member; and

said pivotal pin is detachably inserted through a holding recess formed on said clamp body of said cable clamp.

9. A closure for cable connection as defined in claim 4, wherein said mounting member for fastening said curved holding member to said clamp body of said cable clamp comprises a screw threadedly inserted into a pivotal element pivotally supported on said clamp body of said cable clamp;

said screw including a screw head held on said free end of said curved holding member.

10. A closure for cable connection as defined in claim 8, wherein said mounting member for fastening said curved holding member to said clamp body of said cable clamp comprises a screw threadedly inserted into a pivotal element pivotally supported on said clamp body of said cable clamp;

said screw including a screw head held on said free end of said curved holding member.

11. A closure for cable connection as defined in claim 4, wherein said holding spacers are each constructed of an arcuate element formed on an arcuate inner peripheral surface thereof with a peak-and-valley shaped groove and on an outer peripheral surface thereof with a projection;

said projection being detachably fitted in a recess or a hole formed at a corresponding one of said cable guide recess and curved holding member.

12. A closure for cable connection as defined in claim 8, wherein said holding spacers are each constructed of an arcuate element formed on an arcuate inner peripheral surface thereof with a peak-and-valley shaped groove and on an outer peripheral surface thereof with a projection;

said projection being detachably fitted in a recess or a hole formed at a corresponding one of said cable guide

recess and curved holding member.

13. A closure for cable connection as defined in claim 4, wherein said holding spacers are each slidably mounted on a fitting surface of a corresponding one of said cable guide recess and curved holding member; and

said holding spacers are each formed thereon with at least one arcuate surface which corresponds to the outer periphery of the cable.

14. A closure for cable connection as defined in claim 13, wherein said cable clamp includes distance pieces which are interposedly arranged between a corresponding one of said holding spacers and said cable guide recess and between a corresponding one of said holding spacers and said curved holding member, respectively.

15. A closure for cable connection as defined in claim 13, wherein said holding spacers each comprise a first spacer member and a second spacer member which are detachably joined together through arcuate surfaces formed thereon in correspondence to the outer periphery of the cable.

16. A closure for cable connection as defined in claim 13, wherein said holding spacers are each provided on said arcuate surface with a plurality of ribs which are projectedly arranged at intervals and extend in a direction perpendicular to an axis of the cable.

17. A closure for cable connection as defined in claim 15, wherein the arcuate surface of said first spacer member is formed to be concave and provided thereon with a plurality of ribs which are projectedly arranged at intervals and which extend in a direction perpendicular to an axis of the cable; and

the arcuate surface of said second spacer member is formed to be convex and formed thereon with a plurality of grooves into which said ribs of said first spacer member are fitted.

18. A closure for cable connection as defined in claim 13, wherein said holding spacers are each formed with a pair of arcuate surfaces of different curvatures which are

adaptable to different outer peripheries of cables and which are curved in opposite directions.

19. A closure for cable connection as defined in claim 15, wherein the arcuate surface of said first spacer member is a first concave surface of a large radius and formed therein with a fitting hole;

said first spacer member is formed with a second concave surface of a small radius on an end thereof remote from said first concave surface;

the arcuate surface of said second spacer member is a convex surface conforming with said first concave surface of said first spacer member and provided thereon with a connection rod adapted to be fitted in said fitting hole of said first spacer member; and

said second spacer member is formed with a third concave surface of an intermediate radius on an end thereof remote from said convex surface.

20. A closure for cable connection as defined in claim 13, wherein said clamp body of said cable clamp is provided with a loosening prevention piece for preventing a corresponding one of said holding spacers from loosening; and

said corresponding one of said holding spacers includes an engagement pawl and is provided with a stopper for fixing said engagement pawl to said loosening prevention piece.

21. A closure for cable connection as defined in claim 13, wherein said fitting surface and a mating surface of each of said holding spacers are respectively formed with a plurality of serrated protrusions or teeth which extend in parallel with an axis of the cable.

22. A closure for cable connection as defined in claim 1, wherein said hinges include a plurality of first ring receiving portions formed at a portion of one of said sleeve members in proximity to one of side edges thereof in a manner to be spaced from each other, hinge members each constituted by a first loop-like ring pivotally arranged at a corresponding one of said first ring receiving portions and a plurality of holding recesses for said hinge members, which

holding recesses are arranged at a portion of the other of said sleeve members in proximity to one of side edges therein in a manner to be spaced from each other; and

said fasteners include a plurality of second ring receiving portions formed at a portion of said other sleeve member in proximity to the other side edge in a manner to be spaced from each other, second loop-like rings each pivotally arranged at a corresponding one of said second ring receiving portions, operation levers each pivotally supported at a corresponding one of said second loop-like rings and provided at a distal end thereof with a holding projection, and a plurality of fastener receiving portions which are formed at a portion of said one sleeve member in proximity to the other side edge thereof in a manner to be spaced from each other and in which said holding projections of said operation levers are respectively fitted.

23. A closure for cable connection as defined in claim 22, further comprising gaskets arranged between said abutting joint surfaces of said sleeve members;

said abutting joint surfaces each being chamfered on an outer edge thereof so as to form a recess between the outer edges thereof;

said second loop-like ring of at least one of said fasteners including a retaining member fitted in said recess of said outer edges of said abutting joint surface so as to be arranged along an outside of one of said gaskets.

24. A closure for cable connection as defined in claim 23, wherein said first loop-like ring of at least one of said hinges includes a retaining member fitted in said recess of said outer edges of said abutting joint surface so as to be arranged along an outside of one of said gaskets.

25. A closure for cable connection as defined in claim 24, wherein said retaining member is arranged at said loop-like ring of each of the fastener and hinge positioned on opposite ends of said sleeve in a longitudinal direction thereof.

26. A closure for cable connection as defined in claim

22, further comprising a stopper for holding said first loop-like ring of the hinge at a predetermined angle when said first loop-like ring is pivotally moved about a ring insertion portion formed at said first ring receiving portion;

said stopper being projectedly arranged in proximity to said ring receiving portion of one of said sleeve members.

27. A closure for cable connection as defined in claim 1, wherein said abutting joint surfaces of each of said upper and lower sleeve members are each provided thereon with a recess for fittedly holding a gasket therein in a manner to extend in a longitudinal direction thereof;

said recess being so formed that opposite ends thereof are each reduced in width, to thereby provide a gasket press-fit portion for pressedly fittedly holding said gasket therein.

28. A closure for cable connection as defined in claim 1, wherein said abutting joint surfaces of each of said upper and lower sleeve members are each provided thereon with a recess for fittedly holding a gasket therein in a manner to extend in a longitudinal direction thereof;

said upper and lower sleeve members are each provided with barriers at different portions thereof defined along said recess and on both side edges thereof deviated from each other in the longitudinal direction thereof; and

said barriers of one of said sleeve members are mutually abutted against an inner surface of the other sleeve member to join said sleeve members to each other.

29. A closure for cable connection as defined in claim 1, wherein an airtight tape is wound around an outer periphery of the cable which extends through said cable guide hole so as to provide sealing between the outer periphery of the cable and an inner periphery of said cable guide hole;

said airtight tape being made of a thermoplastic rubber composition which exhibits a penetration of 40 to 90 ( $10^{-1}$  mm), an elongation of 1500 to 2000 percent and a tensile stress of 0.5 to 1.5 kgf/cm<sup>2</sup>.

30. A closure for cable connection as defined in claim

4, wherein an airtight tape is wound around an outer periphery of the cable which extends through said cable guide hole so as to provide sealing between the outer periphery of the cable and an inner periphery of said cable guide hole;

said airtight tape being made of a thermoplastic rubber composition which exhibits a penetration of 40 to 90 ( $10^{-1}$  mm), an elongation of 1500 to 2000 percent and a tensile stress of 0.5 to 1.5 kgf/cm<sup>2</sup>.

ABSTRACT OF THE DISCLOSURE

A closure for cable connection capable of being readily assembled with fastening force of a sufficient level, rapidly accomplishing leading-out of a cable from a cable connection section and storage of the cable, and exhibiting enhanced airtightness while exhibiting increased reliability. The closure includes sleeve members and end plates. The end plates are each provided with slits which extend from cable guide holes to an outer surface of the end plate. Each cable guide hole is provided thereon with a thin-wall cap and the slit is detachably fitted therein with a rigidity holding member. An adhesive tape-like gasket is interposed between an outer periphery of the end plate and an inner surface of a sleeve so as to cover an outer end portion of the slit.

# DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

ATTORNEY'S DOCKET NO.: KAMMON 3.0-025

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: \_\_\_\_\_

CLOSURE FOR CABLE CONNECTION, the specification of which

☐ is attached hereto

☒ was filed on February 12, 1997 as United States Application Number or PCT International Application

Number 08/799,400 and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed:

## PRIOR FOREIGN APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (month, day, year)	PRIORITY CLAIMED
Japan	7-309733	November 6, 1995	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>
Japan	7-309734	November 6, 1995	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

LISTING OF FOREIGN APPLICATIONS CONTINUED ON PAGE 3 HEREOF ☐ YES ☒ NO

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Application Number: \_\_\_\_\_ Filing Date: \_\_\_\_\_

Application Number: \_\_\_\_\_ Filing Date: \_\_\_\_\_

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Parent Application Serial Number: \_\_\_\_\_ Parent Filing Date: \_\_\_\_\_ Parent Patent No.: \_\_\_\_\_

U.S. Parent Application Serial Number: \_\_\_\_\_ Parent Filing Date: \_\_\_\_\_ Parent Patent No.: \_\_\_\_\_

PCT Parent Number: \_\_\_\_\_ Parent Filing Date: \_\_\_\_\_

LISTING OF US APPLICATIONS CONTINUED ON PAGE 3 HEREOF: ☐ YES ☒ NO

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Lawrence I. Lerner, Reg. No. 19,516; Sidney David, Reg. No. 22,788; Joseph S. Littenberg, Reg. No. 20,832; Arnold H. Krumholz, Reg. No. 25,428; William L. Mentlik, Reg. No. 27,108; John R. Nelson, Reg. No. 26,573; Roy H. Wepner, Reg. No. 28,350; Stephen B. Goldman, Reg. No. 28,512; Paul H. Kochanski, Reg. No. 29,660; Marcus J. Millet, Reg. No. 28,241; Bruce H. Sales, Reg. No. 32,783; Daniel H. Bobis, Reg. No. 16,694; Peter J. Butch III, Reg. No. 32,203; Keith E. Gilman, Reg. No. 32,137; Robert B. Cohen, Reg. No. 32,768; Arnold B. Dompieri, Reg. No. 29,736; Michael H. Teschner, Reg. No. 32,862; Jeffrey S. Dickey, Reg. No. 35,858; Gregory S. Gewirtz, Reg. No. 36,522; Jonathan A. David, Reg. No. 36,494; Shawn P. Foley, Reg. No. 33,071; Robert T. Canavan, Reg. No. 37,592.

## SEND CORRESPONDENCE TO:

LERNER, DAVID, LITTENBERG,  
KRUMHOLZ & MENTLIK  
600 South Avenue West  
Westfield, New Jersey 07090

## DIRECT TELEPHONE CALLS TO:

(name and telephone number)

Arnold H. Krumholz  
(908) 654-5000 Fax: (908) 654-7866



# DECLARATION -- Page 2

ATTORNEY DOCKET NO. KAMMON 3.0-025

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name): Daijiro SASAKI

Inventor's signature Daijiro Sasaki Date April 21, 1997

Residence: 3-5-11, Sendagaya, Shibuya-ku, Tokyo, Japan JPX Citizenship: Japan

Post Office Address: same as above

Full name of second joint inventor, if any (given name, family name): Kinji MINESHIMA

Second Inventor's signature Kinji Mineshima Date April 21, 1997

Residence: 498, Kashiwazaki, Higashimatsuyama-shi, Saitama, Japan JPX Citizenship: Japan

Post Office Address: same as above

Full name of third joint inventor, if any (given name, family name): Akira NISHIMURA

Third Inventor's signature Akira Nishimura Date April 21, 1997

Residence: 743-21-109, Kisomachi, Machida-shi, Tokyo, Japan JPX Citizenship: Japan

Post Office Address: same as above

Full name of fourth joint inventor, if any (given name, family name): Koji YAMAGIWA

Fourth Inventor's signature Koji Yamagiwa Date April 21, 1997

Residence: 152-223, Motosojamachi, Maebashi-shi, Gunma, Japan JPX Citizenship: Japan

Post Office Address: same as above

Full name of fifth joint inventor (given name, family name): Tetsuya HOSHIJIMA

Fifth Inventor's signature Tetsuya Hoshijima Date April 21, 1997

Residence: 3-1-204-910, Takezono, Tsukuba-shi, Ibaragi, Japan JPX Citizenship: Japan

Post Office Address: same as above

Full name of sixth joint inventor, if any (given name, family name): Yoshiyuki YOSHII

Sixth Inventor's signature Yoshiyuki Yoshii Date April 21, 1997

Residence: 2-31-17, Katsutadai, Yachiyo-shi, Chiba, Japan JPX Citizenship: Japan

Post Office Address: same as above

Full name of seventh joint inventor, if any (given name, family name): \_\_\_\_\_

Seventh Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Full name of eighth joint inventor, if any (given name, family name): \_\_\_\_\_

Eighth Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

004666400

67212 U.S. PTO  
08/799400  
02/12/97

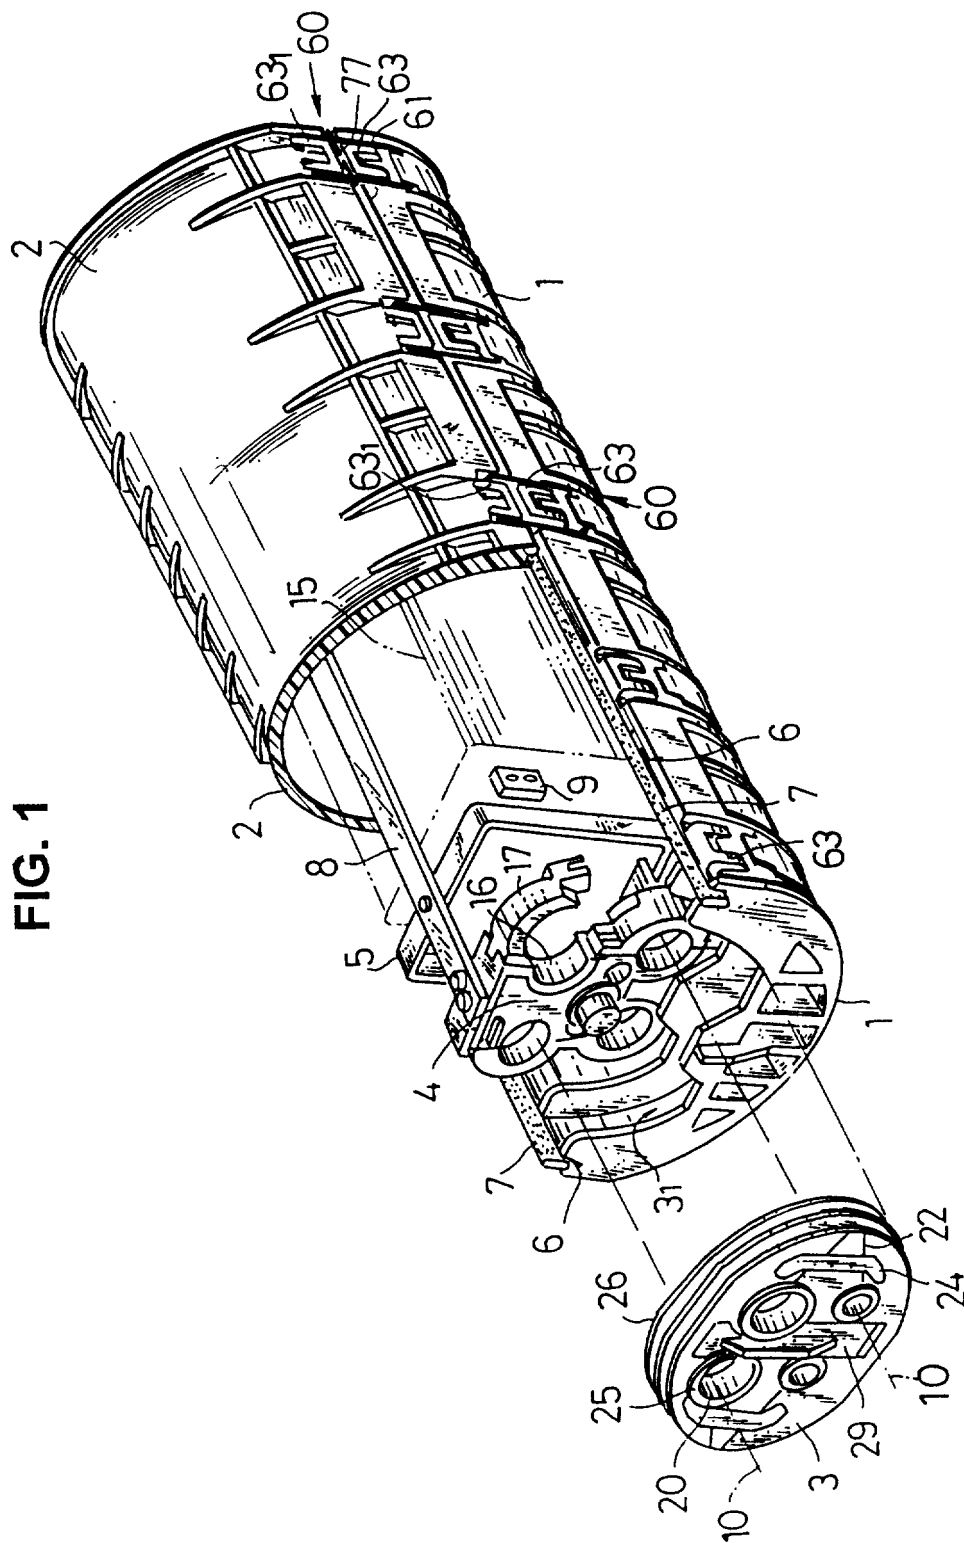


FIG. 2

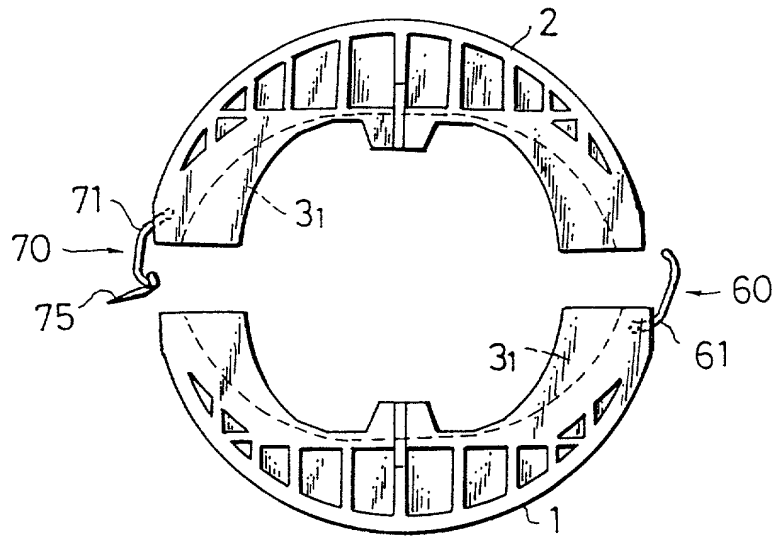


FIG. 3

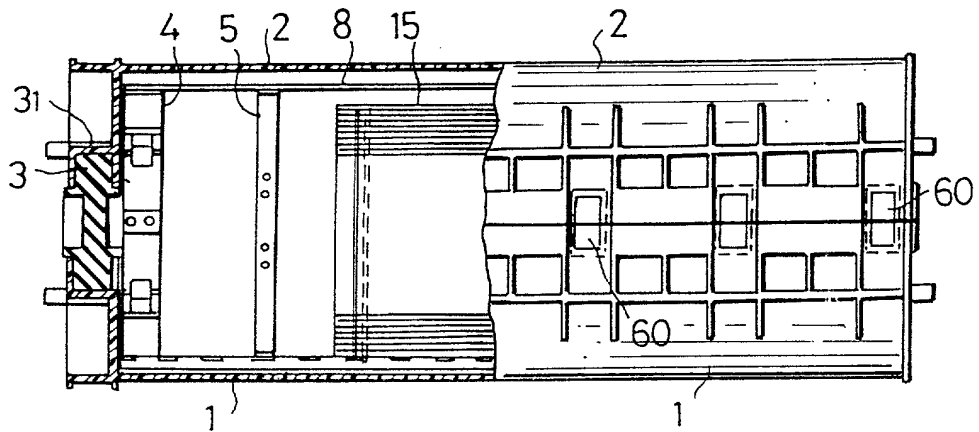


FIG. 4

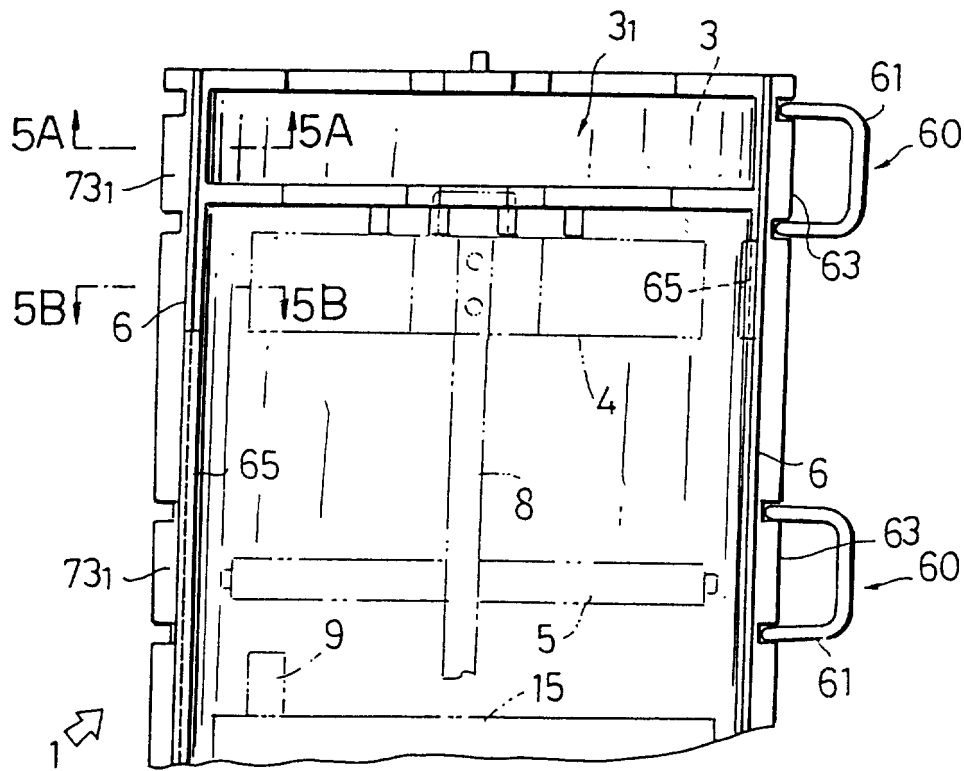


FIG. 5A

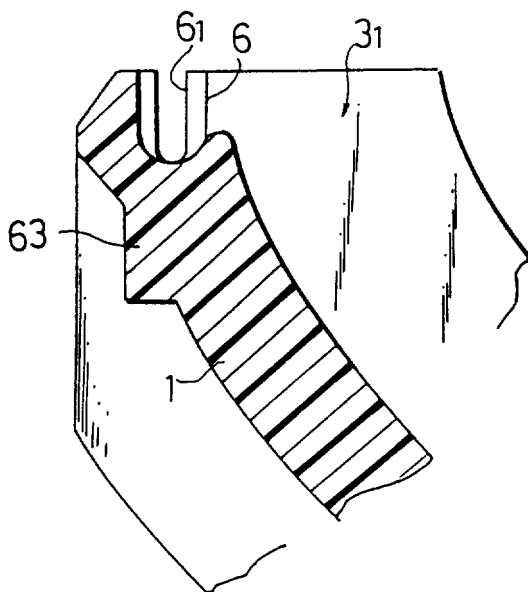


FIG. 5B

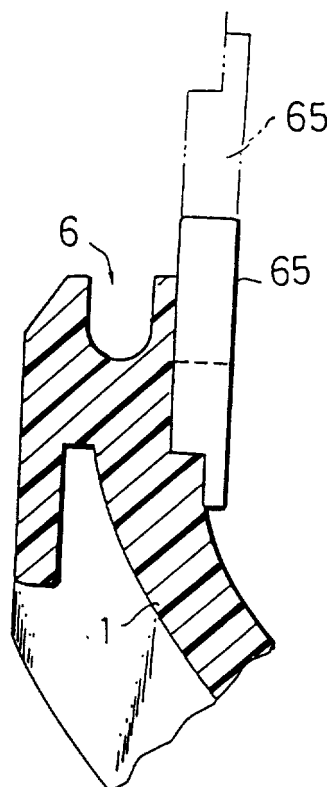


FIG. 6A



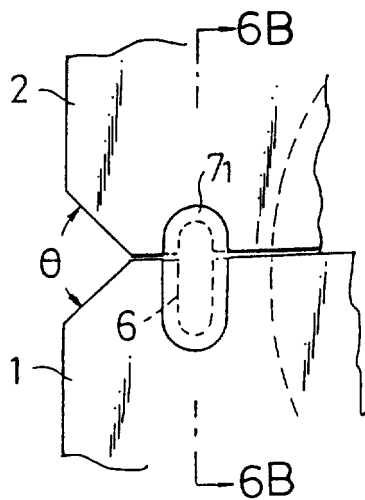


FIG. 6B

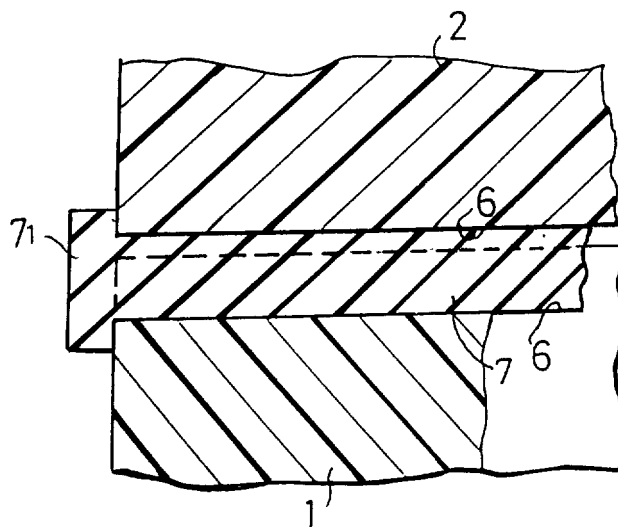


122

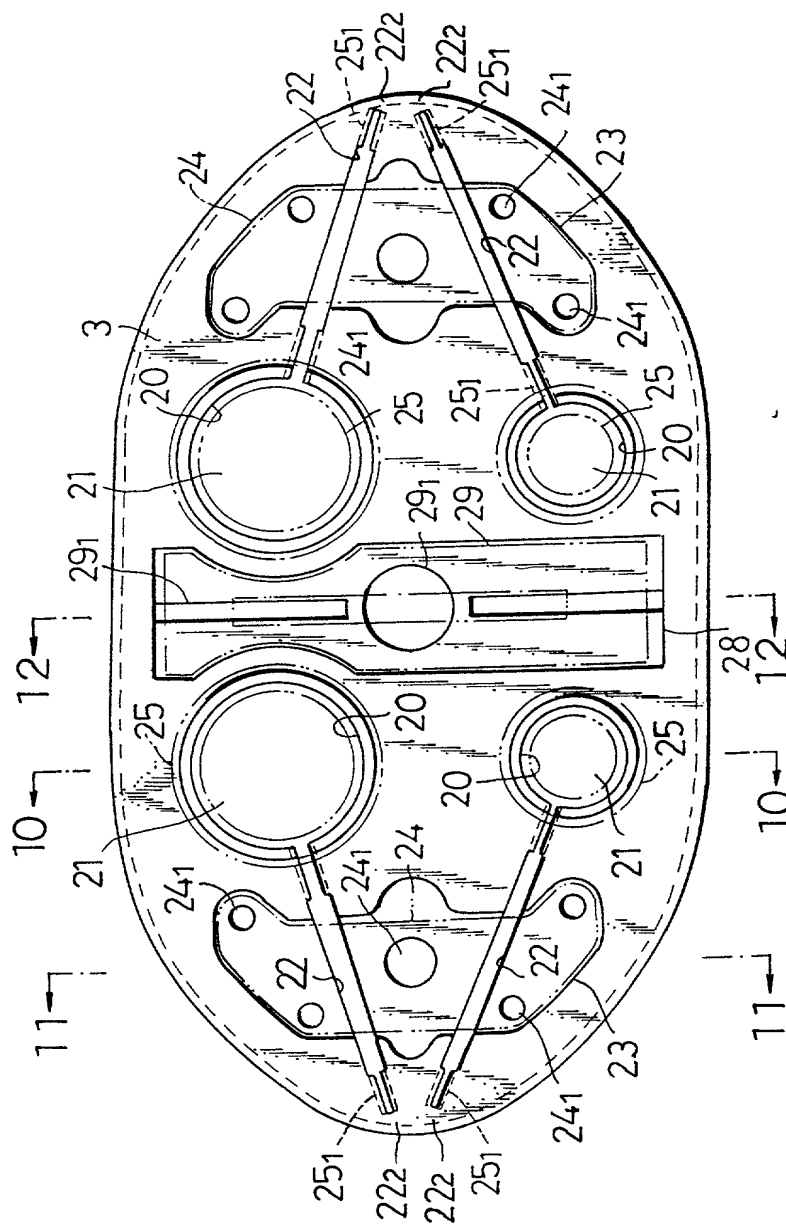

452120" 00466280


FIG. 8

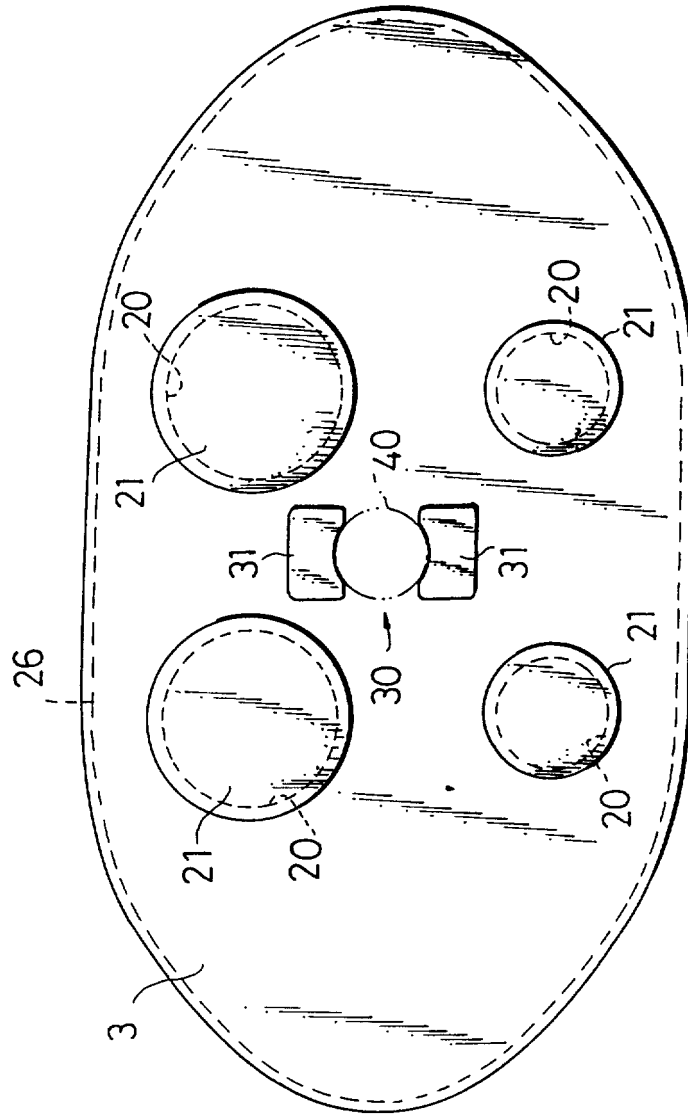

67212 U.S. PTO  
08/799400  
02/12/97



FIG. 9

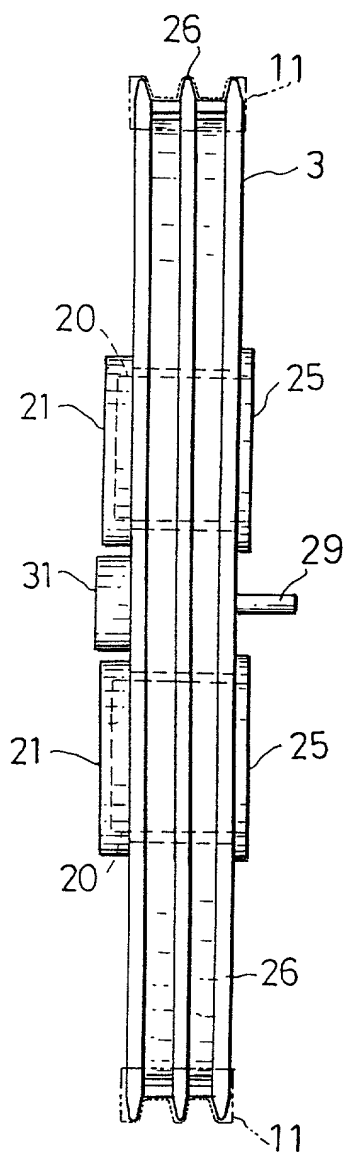

08799400-021297



FIG. 10


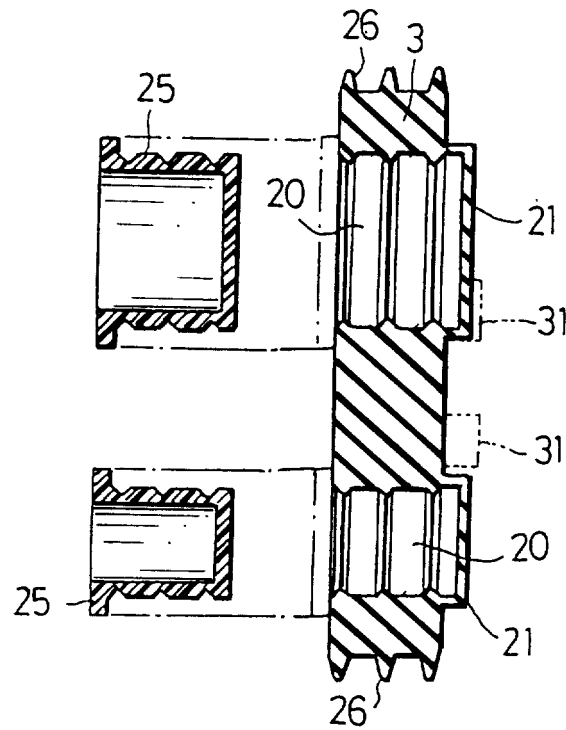


FIG. 11

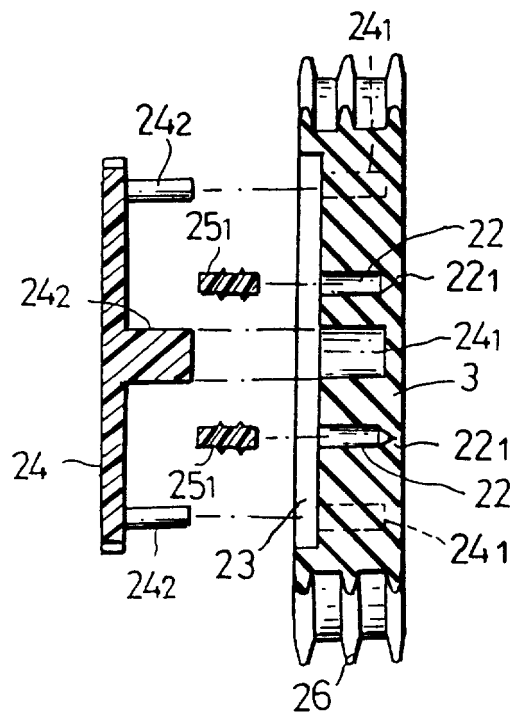

1. **Introduction**  
 2. **Background**  
 3. **Methodology**  
 4. **Results**  
 5. **Discussion**  
 6. **Conclusion**  
 7. **References**  
 8. **Appendix**  
 9. **Figure 1**  
 10. **Figure 2**  
 11. **Figure 3**  
 12. **Figure 4**  
 13. **Figure 5**  
 14. **Figure 6**  
 15. **Figure 7**  
 16. **Figure 8**  
 17. **Figure 9**  
 18. **Figure 10**  
 19. **Figure 11**  
 20. **Figure 12**  
 21. **Figure 13**  
 22. **Figure 14**  
 23. **Figure 15**  
 24. **Figure 16**  
 25. **Figure 17**  
 26. **Figure 18**  
 27. **Figure 19**  
 28. **Figure 20**  
 29. **Figure 21**  
 30. **Figure 22**  
 31. **Figure 23**  
 32. **Figure 24**  
 33. **Figure 25**  
 34. **Figure 26**  
 35. **Figure 27**  
 36. **Figure 28**  
 37. **Figure 29**  
 38. **Figure 30**  
 39. **Figure 31**  
 40. **Figure 32**  
 41. **Figure 33**  
 42. **Figure 34**  
 43. **Figure 35**  
 44. **Figure 36**  
 45. **Figure 37**  
 46. **Figure 38**  
 47. **Figure 39**  
 48. **Figure 40**  
 49. **Figure 41**  
 50. **Figure 42**  
 51. **Figure 43**  
 52. **Figure 44**  
 53. **Figure 45**  
 54. **Figure 46**  
 55. **Figure 47**  
 56. **Figure 48**  
 57. **Figure 49**  
 58. **Figure 50**  
 59. **Figure 51**  
 60. **Figure 52**  
 61. **Figure 53**  
 62. **Figure 54**  
 63. **Figure 55**  
 64. **Figure 56**  
 65. **Figure 57**  
 66. **Figure 58**  
 67. **Figure 59**  
 68. **Figure 60**  
 69. **Figure 61**  
 70. **Figure 62**  
 71. **Figure 63**  
 72. **Figure 64**  
 73. **Figure 65**  
 74. **Figure 66**  
 75. **Figure 67**  
 76. **Figure 68**  
 77. **Figure 69**  
 78. **Figure 70**  
 79. **Figure 71**  
 80. **Figure 72**  
 81. **Figure 73**  
 82. **Figure 74**  
 83. **Figure 75**  
 84. **Figure 76**  
 85. **Figure 77**  
 86. **Figure 78**  
 87. **Figure 79**  
 88. **Figure 80**  
 89. **Figure 81**  
 90. **Figure 82**  
 91. **Figure 83**  
 92. **Figure 84**  
 93. **Figure 85**  
 94. **Figure 86**  
 95. **Figure 87**  
 96. **Figure 88**  
 97. **Figure 89**  
 98. **Figure 90**  
 99. **Figure 91**  
 100. **Figure 92**  
 101. **Figure 93**  
 102. **Figure 94**  
 103. **Figure 95**  
 104. **Figure 96**  
 105. **Figure 97**  
 106. **Figure 98**  
 107. **Figure 99**  
 108. **Figure 100**  
 109. **Figure 101**  
 110. **Figure 102**  
 111. **Figure 103**  
 112. **Figure 104**  
 113. **Figure 105**  
 114. **Figure 106**  
 115. **Figure 107**  
 116. **Figure 108**  
 117. **Figure 109**  
 118. **Figure 110**  
 119. **Figure 111**  
 120. **Figure 112**  
 121. **Figure 113**  
 122. **Figure 114**  
 123. **Figure 115**  
 124. **Figure 116**  
 125. **Figure 117**  
 126. **Figure 118**  
 127. **Figure 119**  
 128. **Figure 120**  
 129. **Figure 121**  
 130. **Figure 122**  
 131. **Figure 123**  
 132. **Figure 124**  
 133. **Figure 125**  
 134. **Figure 126**  
 135. **Figure 127**  
 136. **Figure 128**  
 137. **Figure 129**  
 138. **Figure 130**  
 139. **Figure 131**  
 140. **Figure 132**  
 141. **Figure 133**  
 142. **Figure 134**  
 143. **Figure 135**  
 144. **Figure 136**  
 145. **Figure 137**  
 146. **Figure 138**  
 147. **Figure 139**  
 148. **Figure 140**  
 149. **Figure 141**  
 150. **Figure 142**  
 151. **Figure 143**  
 152. **Figure 144**  
 153. **Figure 145**  
 154. **Figure 146**  
 155. **Figure 147**  
 156. **Figure 148**  
 157. **Figure 149**  
 158. **Figure 150**  
 159. **Figure 151**  
 160. **Figure 152**  
 161. **Figure 153**  
 162. **Figure 154**  
 163. **Figure 155**  
 164. **Figure 156**  
 165. **Figure 157**  
 166. **Figure 158**  
 167. **Figure 159**  
 168. **Figure 160**  
 169. **Figure 161**  
 170. **Figure 162**  
 171. **Figure 163**  
 172. **Figure 164**  
 173. **Figure 165**  
 174. **Figure 166**  
 175. **Figure 167**  
 176. **Figure 168**  
 177. **Figure 169**  
 178. **Figure 170**  
 179. **Figure 171**  
 180. **Figure 172**  
 181. **Figure 173**  
 182. **Figure 174**  
 183. **Figure 175**  
 184. **Figure 176**  
 185. **Figure 177**  
 186. **Figure 178**  
 187. **Figure 179**  
 188. **Figure 180**  
 189. **Figure 181**  
 190. **Figure 182**  
 191. **Figure 183**  
 192. **Figure 184**  
 193. **Figure 185**  
 194. **Figure 186**  
 195. **Figure 187**  
 196. **Figure 188**  
 197. **Figure 189**  
 198. **Figure 190**  
 199. **Figure 191**  
 200. **Figure 192**  
 201. **Figure 193**  
 202. **Figure 194**  
 203. **Figure 195**  
 204. **Figure 196**  
 205. **Figure 197**  
 206. **Figure 198**  
 207. **Figure 199**  
 208. **Figure 200**  
 209. **Figure 201**  
 210. **Figure 202**  
 211. **Figure 203**  
 212. **Figure 204**  
 213. **Figure 205**  
 214. **Figure 206**  
 215. **Figure 207**  
 216. **Figure 208**  
 217. **Figure 209**

FIG. 13A

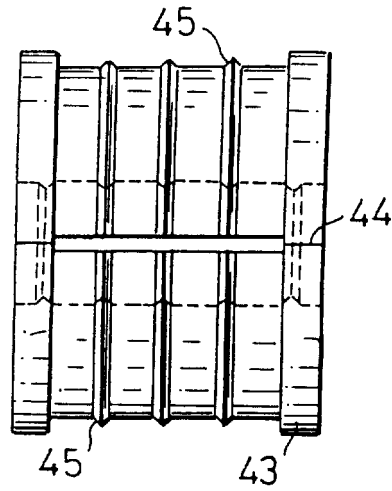


FIG. 13B

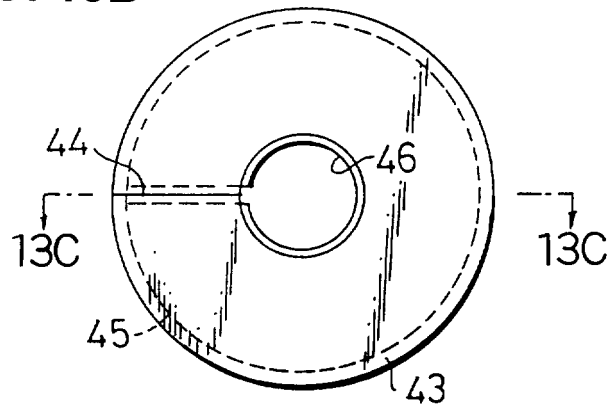


FIG. 13C

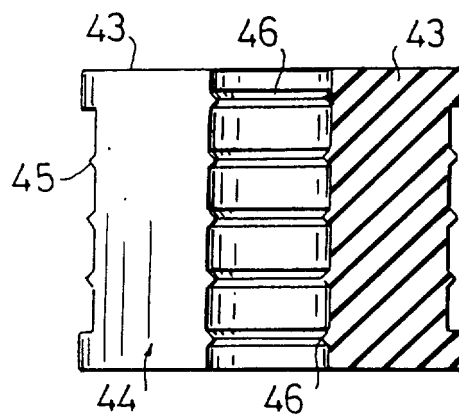


FIG. 14

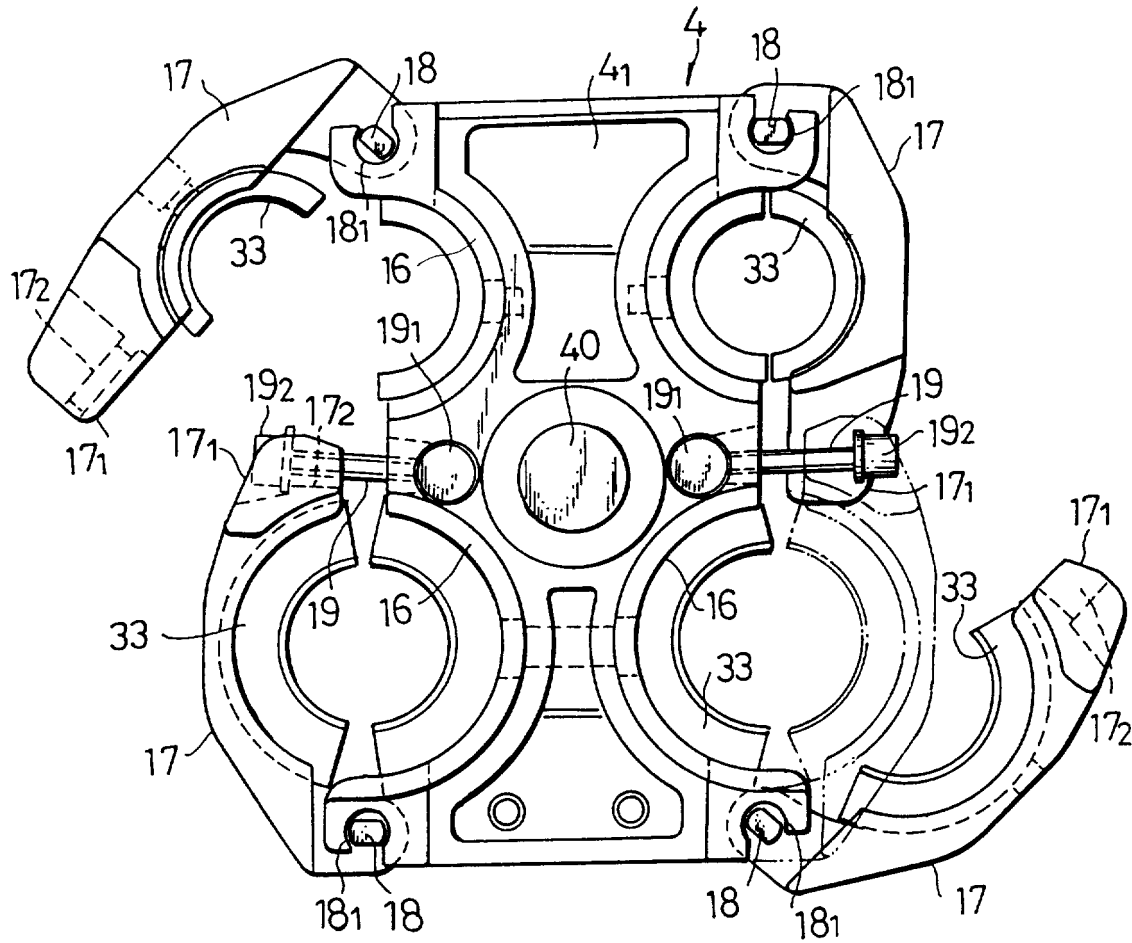


FIG. 15

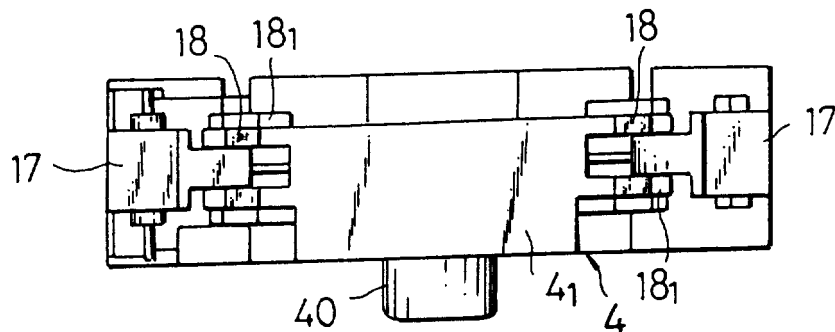




FIG. 16A

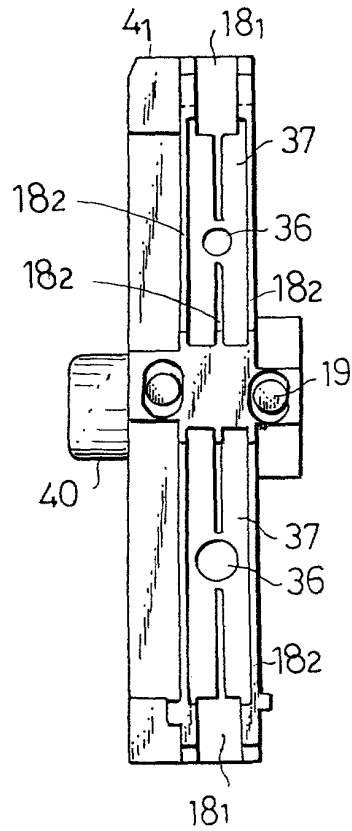


FIG. 16B

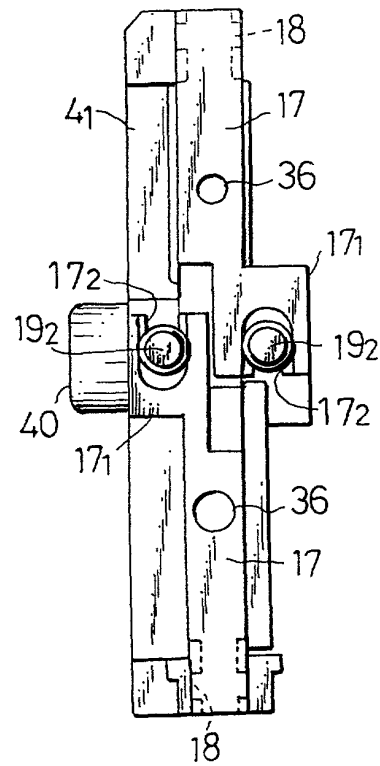


FIG. 17A

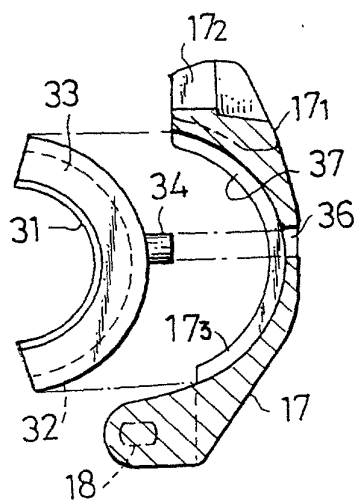


FIG. 17B


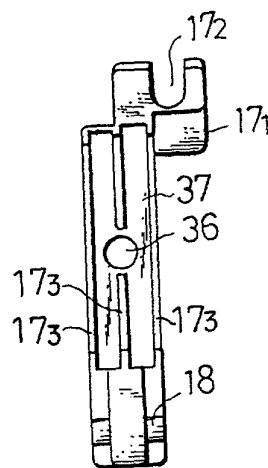


FIG. 17C



62720 00466280

FIG. 18A

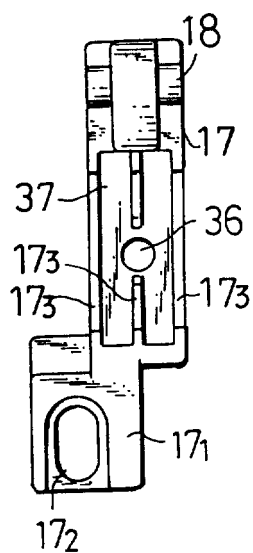


FIG. 18B

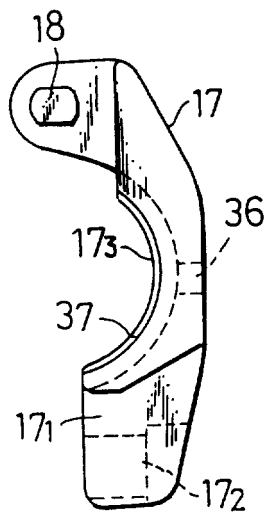


FIG. 18C

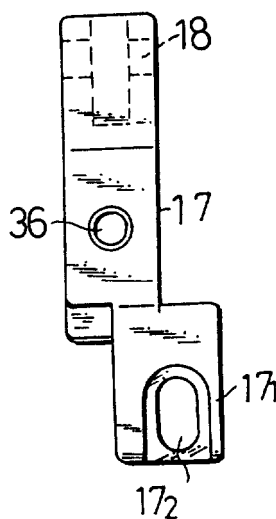


FIG. 18D




FIG. 19A

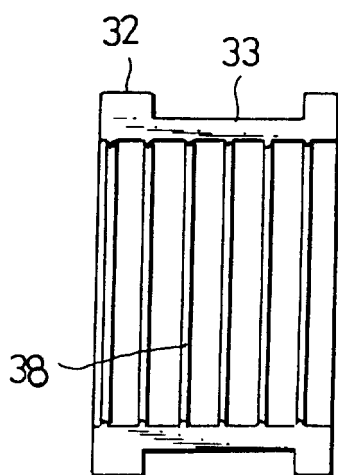


FIG. 19B

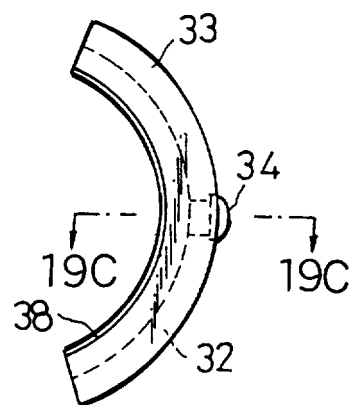


FIG. 19C






FIG. 20

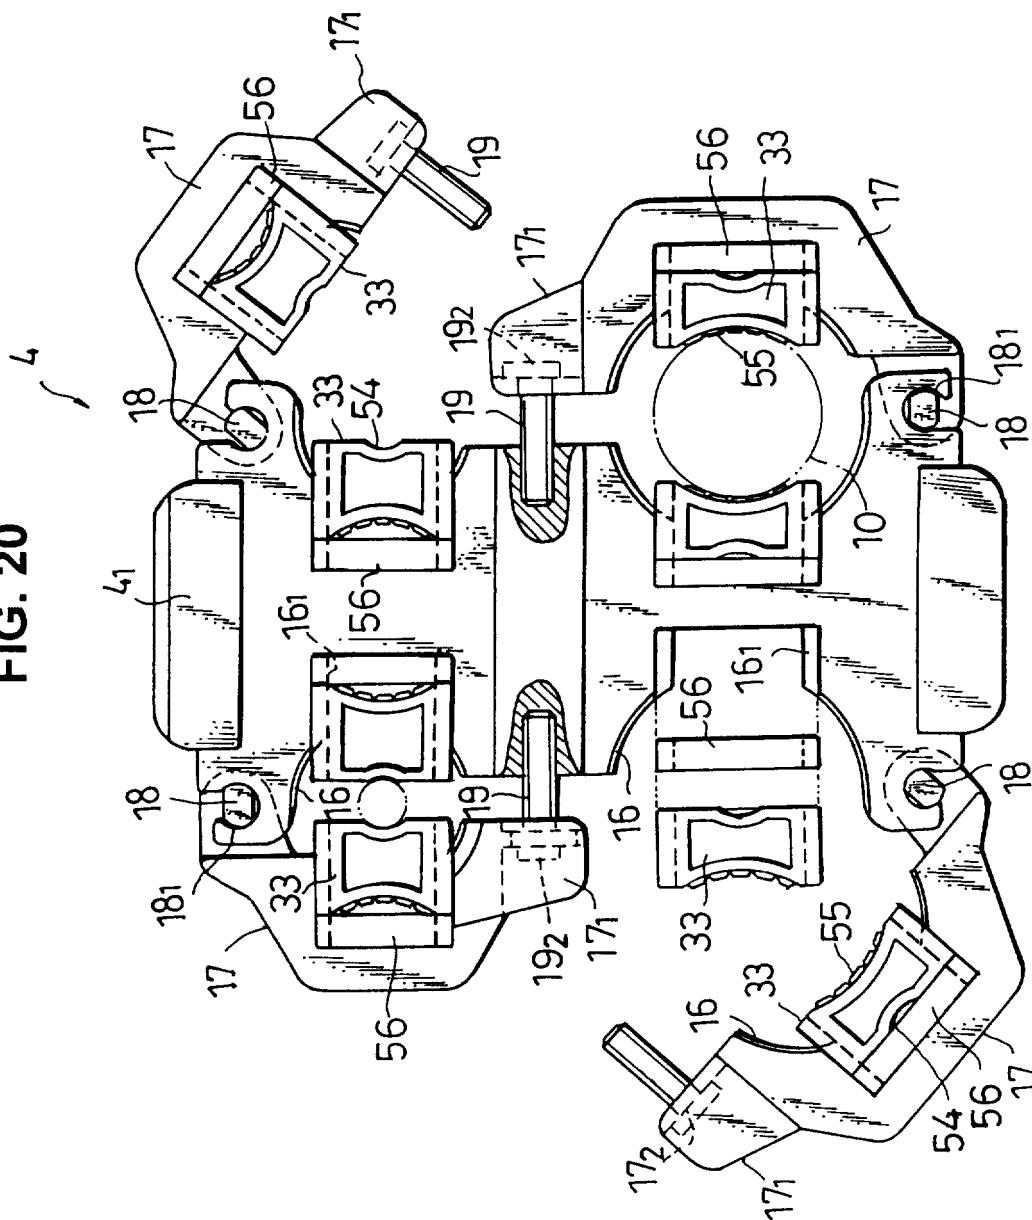


FIG. 21A

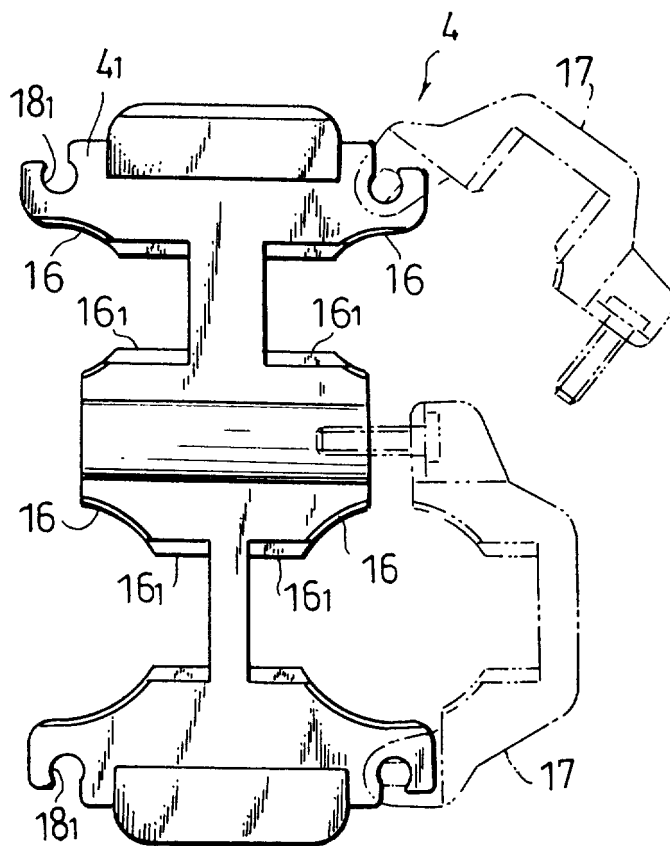


FIG. 21B

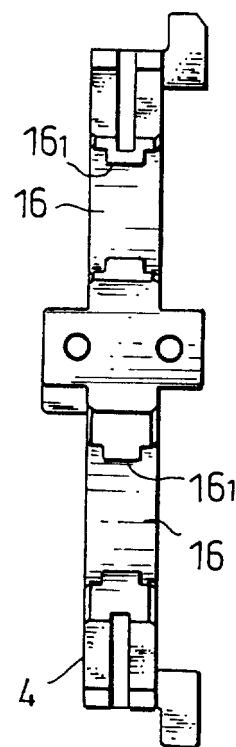


FIG. 21C

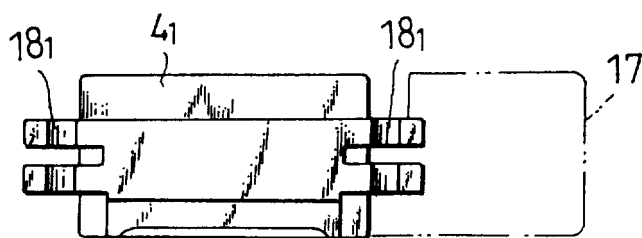


FIG. 22A

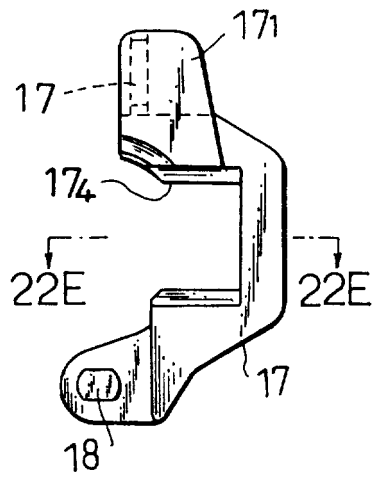


FIG. 22B

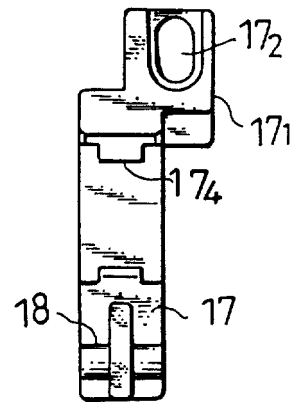


FIG. 22C




FIG. 22D




FIG. 22E

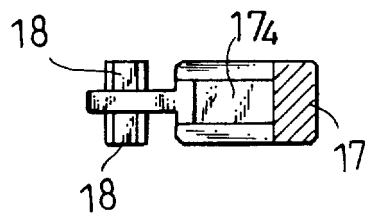


FIG. 23A

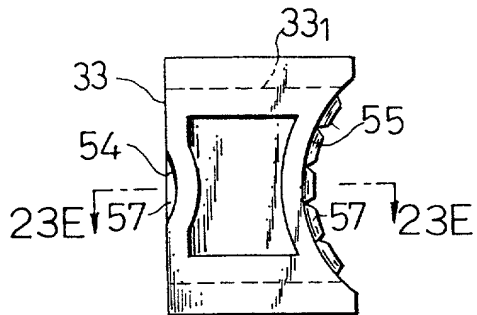


FIG. 23B




FIG. 23C




FIG. 23D




FIG. 23E




FIG. 23A

FIG. 24A

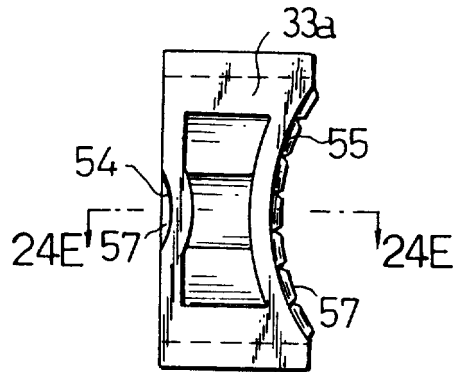


FIG. 24B

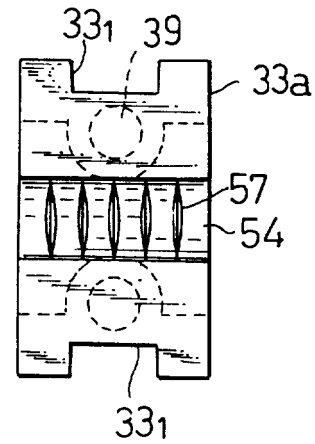


FIG. 24C

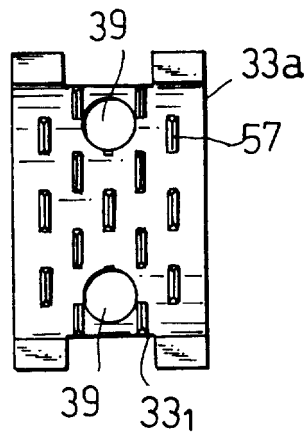


FIG. 24D





FIG. 24E



67212 U.S. PTO  
08/799400  
02/12/97



FIG. 25A

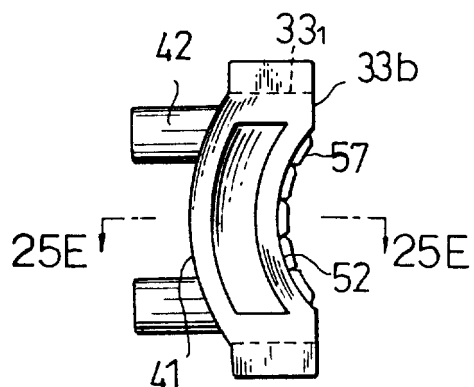


FIG. 25B

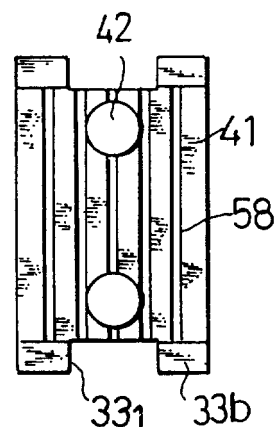


FIG. 25C

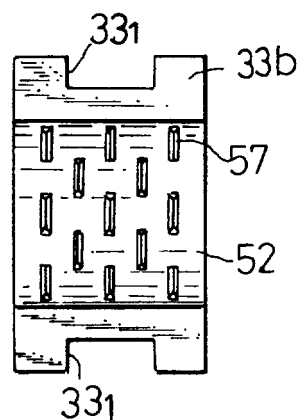


FIG. 25D




FIG. 25E




FIG. 25A

FIG. 26A

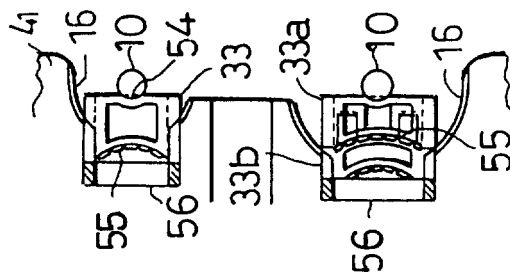


FIG. 26B

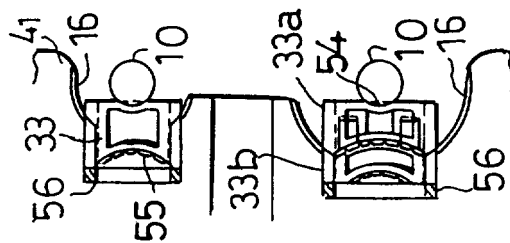


FIG. 26C

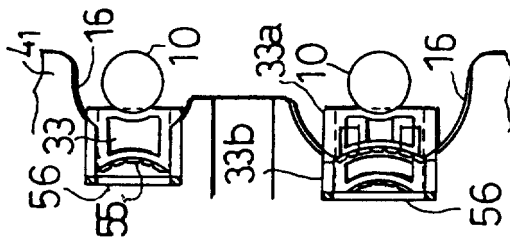


FIG. 26D

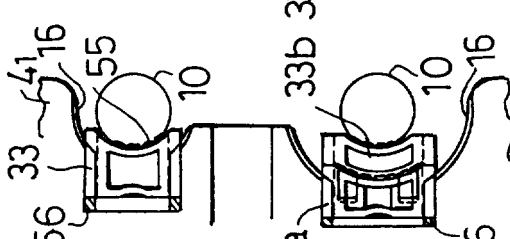


FIG. 26E

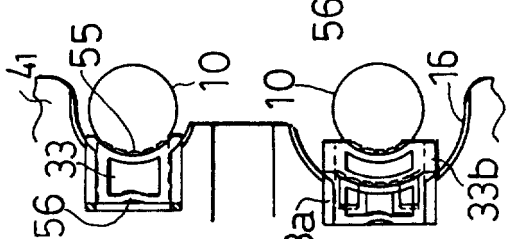


FIG. 26F

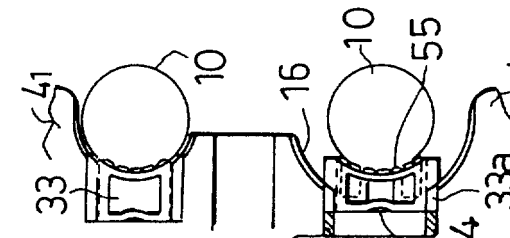


FIG. 26G




FIG. 26H




FIG. 26I










FIG. 29A

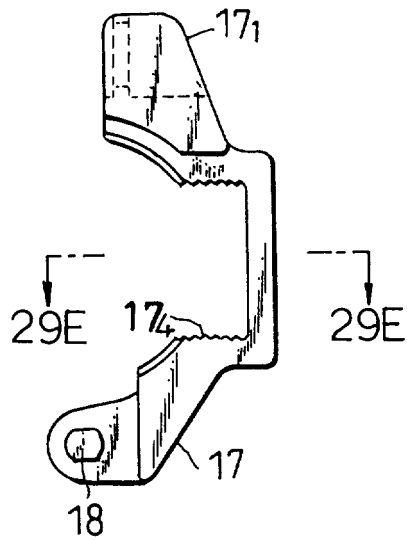


FIG. 29B

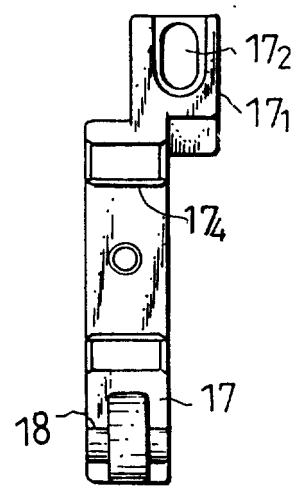


FIG. 29C




FIG. 29D







FIG. 29E

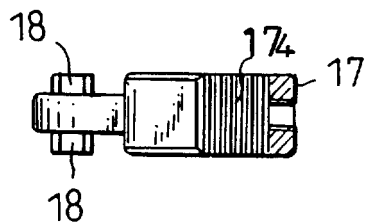


**FIG. 30A**

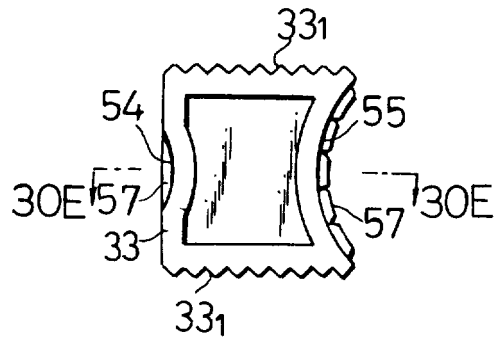


**FIG. 30B**



**FIG. 30C**

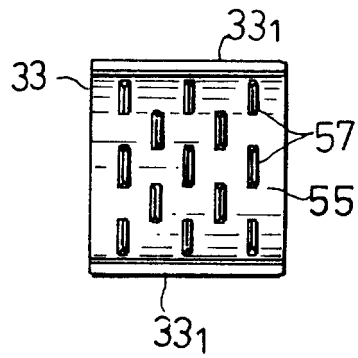

**FIG. 30D**



**FIG. 30E**




FIG. 31A

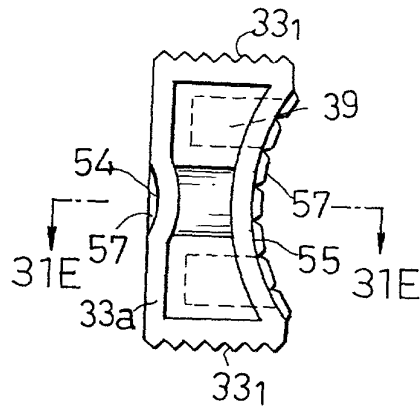


FIG. 31B

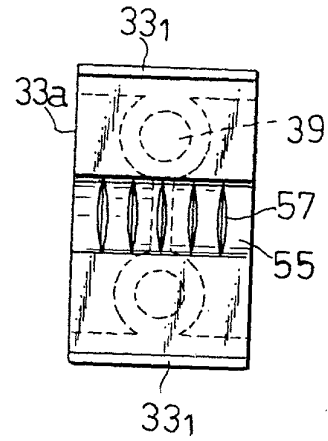


FIG. 31C

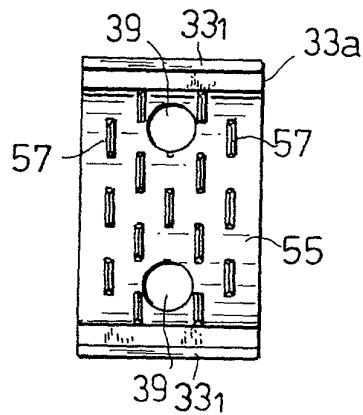


FIG. 31D




FIG. 31E






FIG. 32A

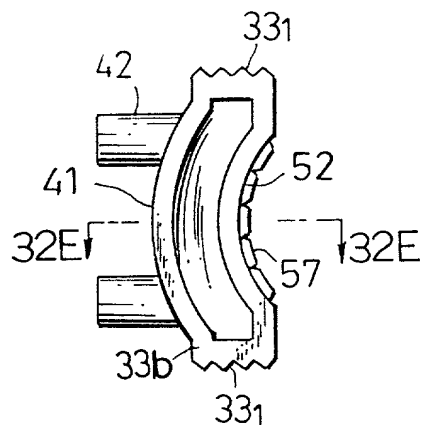


FIG. 32B

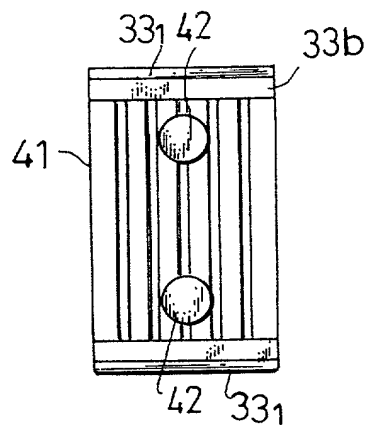


FIG. 32C

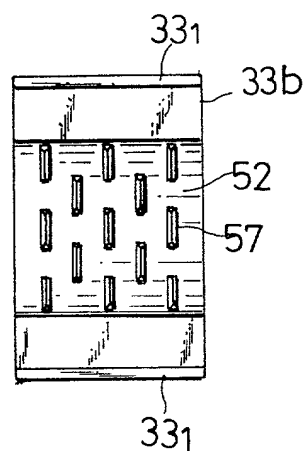


FIG. 32D




FIG. 32E




FIG. 33A

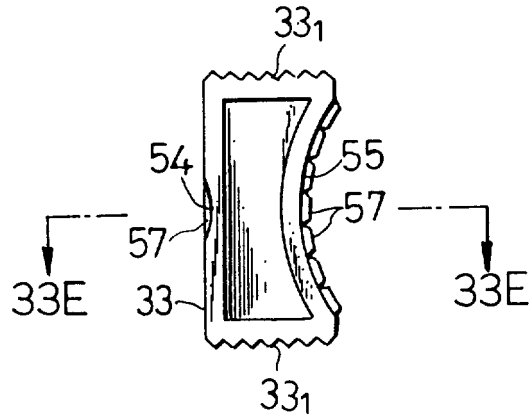


FIG. 33B

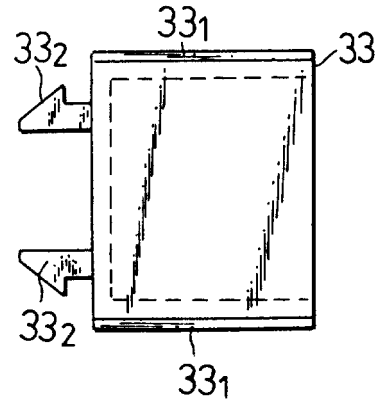


FIG. 33C

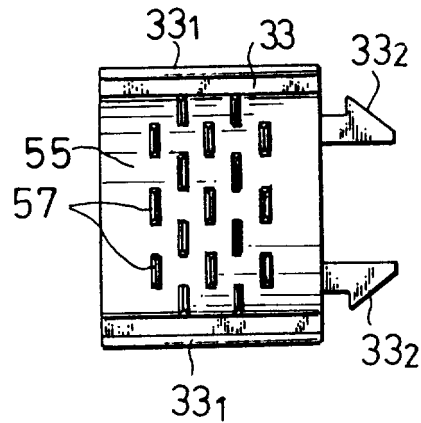


FIG. 33D

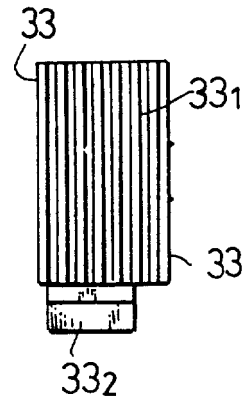


FIG. 33E

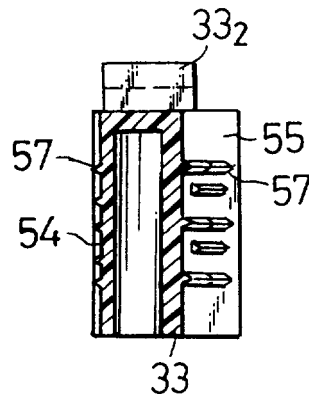




FIG. 35A


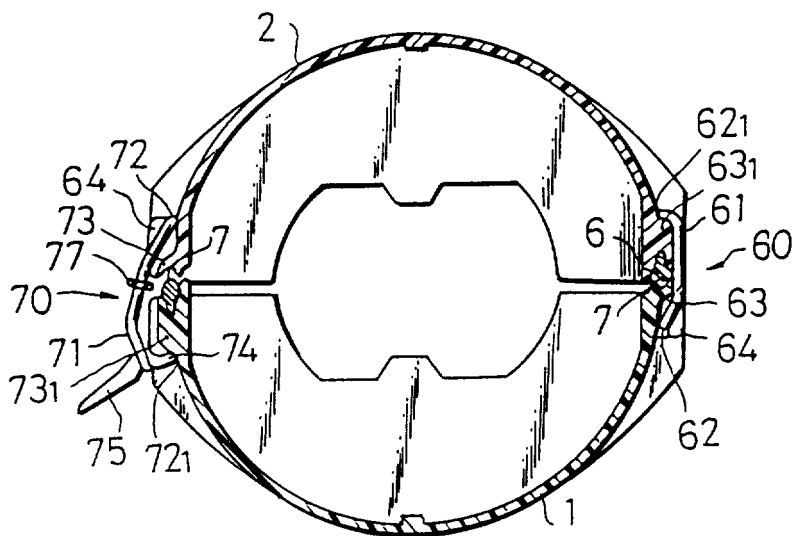


FIG. 35B



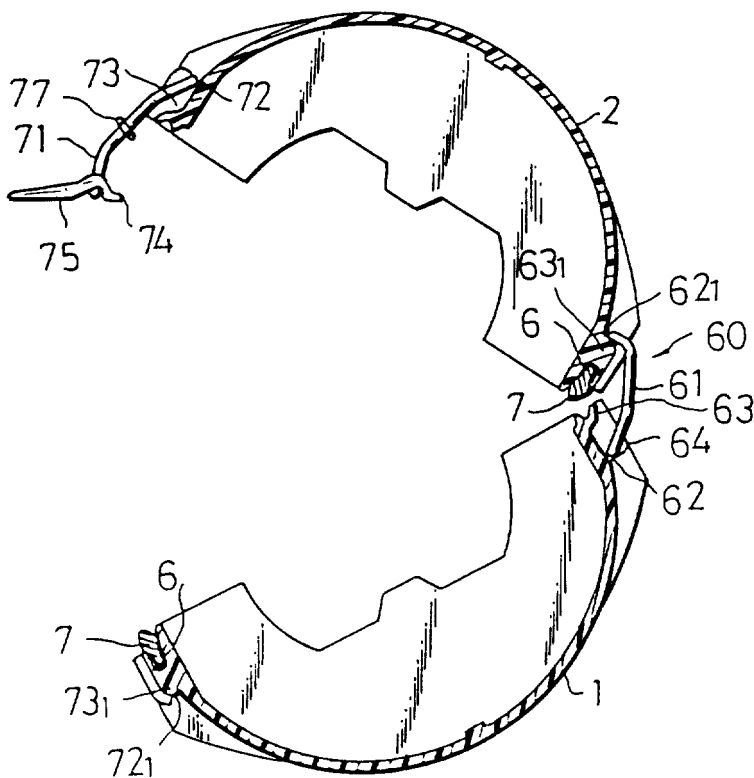

462120" 00466280

67212 U.S. PTO

08/799400



02/12/97

FIG. 36

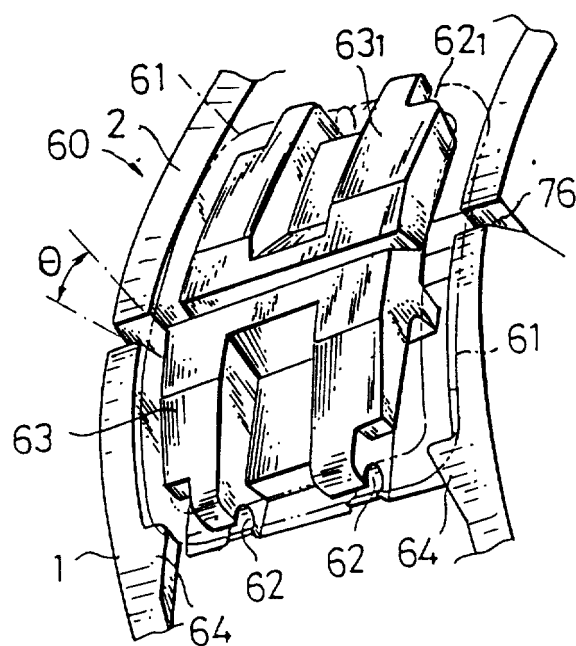


FIG. 37


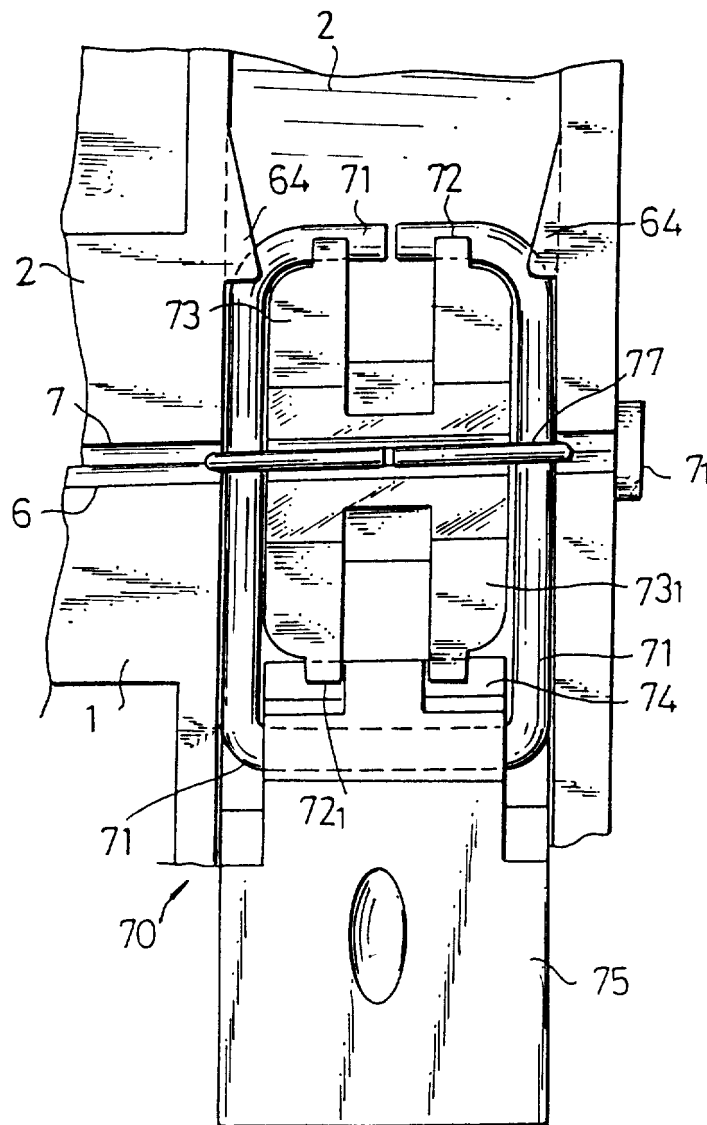


FIG. 38

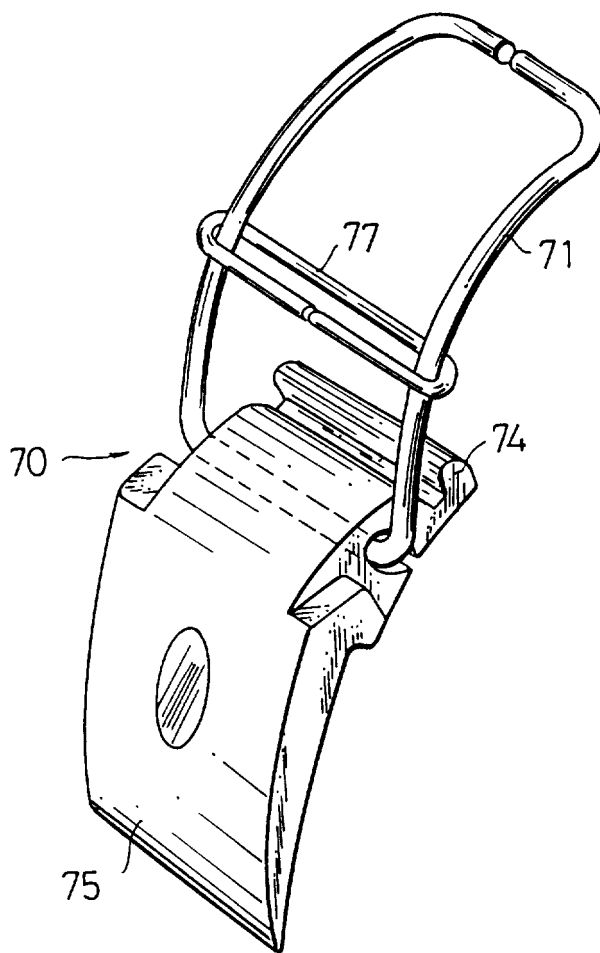

08799400-021297



FIG. 39

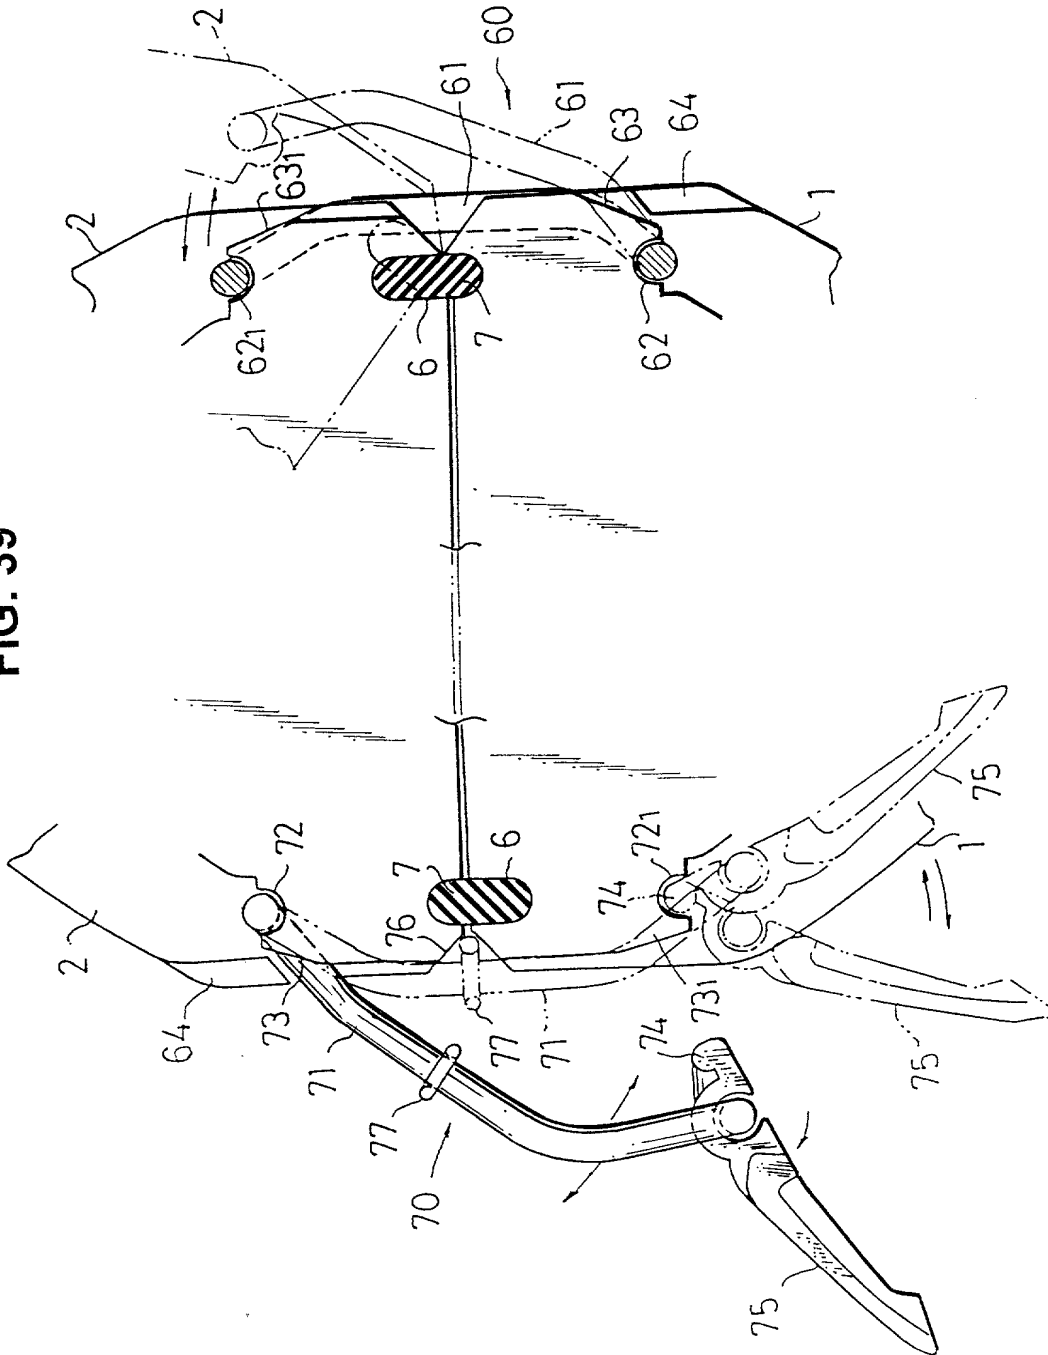


FIG. 40A


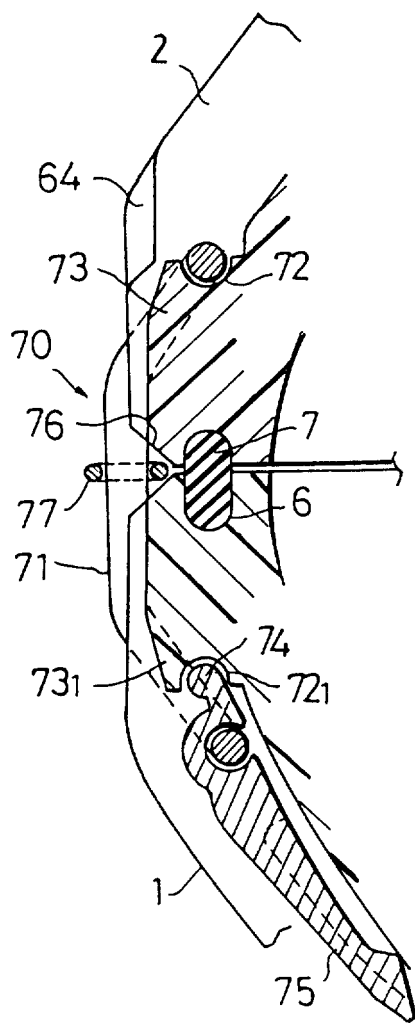


FIG. 40B

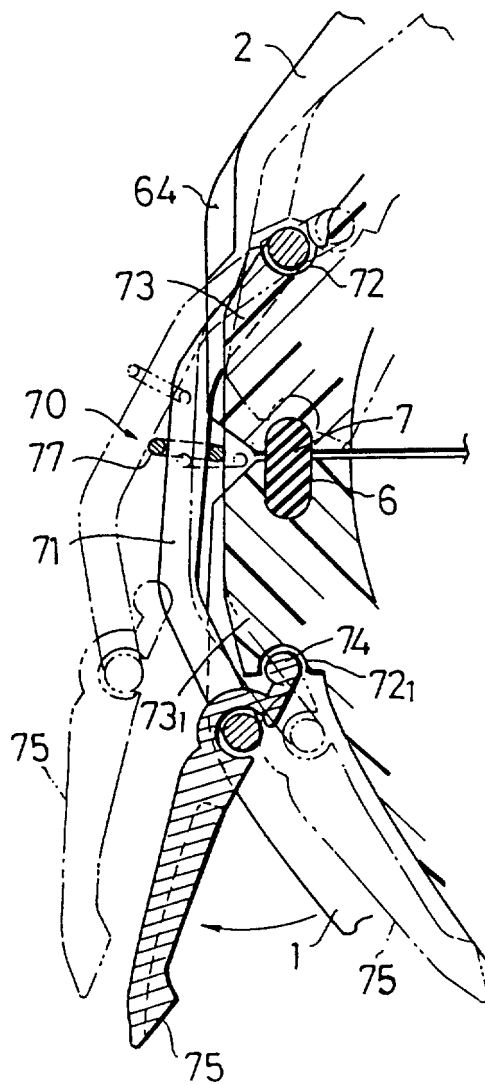

08799400 021297

FIG. 41A

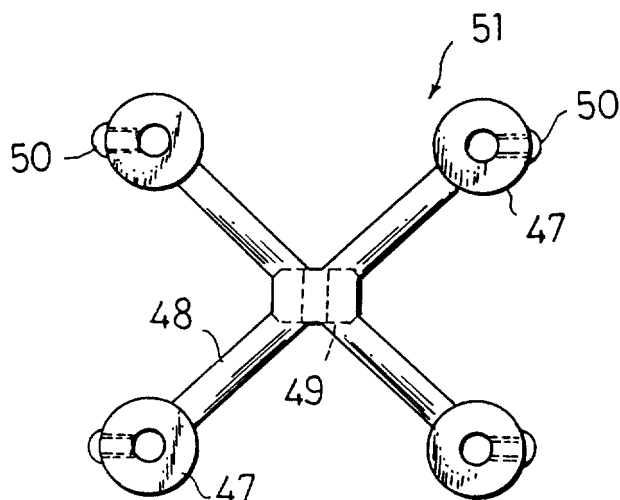


FIG. 41B

